

PMP5291 Test report:

Pages 1-2: regulation / efficiency / thermal

Page 3: output ripple

Pages 4-6: Main switching waveforms

Pages 7-9: Charger output behavior

Regulation / losses: Done with resistive load model t2: Chokes 2x 4.7uHy 1mm high

Vin Volts	Iin mA	Vout1 Volts	Iout1 mA	Load resistance	Losses in mW**	Efficiency %
11.01	191.5	3.116	491.5	6 ohms	577	72.6
11.01	214	3.598	491.5	7 ohms	588	75.1
11.01	236	4.095	491	8 ohms	588	77.4
11.01	222	4.202	452.5	9 ohms	543	77.8
11.01	172	4.206	345	12 ohms	443	76.6
11.02	129	4.206	245	17 ohms	391	72.5
11.02	91	4.206	153	27 ohms	359	64.2
11.02	67.5	4.206	101	41 ohms	319	57.1
11.02	48	4.206	53	79 ohms	306	42.1
11.02	61.5	0 to 0.26	48	0 to 5 ohm	Up to 677	Pre-charge
5.01	384.5	3.113	492	6 ohms	395	79.5
5.01	432.5	3.589	492	7 ohms	401	81.5
5.00	477	4.078	491	8 ohms	383	84.0
5.01	444	4.2025	453	9 ohms	321	85.6
5.01	337	4.206	345	12 ohms	237	85.9
5.02	239	4.206	245	17 ohms	169	85.9
5.03	153	4.206	153	27 ohms	126	83.6
5.03	106	4.206	101	41 ohms	108	79.7
5.03	63	4.206	53	79 ohms	94	70.3
5.03	55 to 56	0 to 0.25	46	0 to 5 ohm	Up to 282	Pre-charge

When current reached 50mA at 4.206 Vout at both 5Vin and 11Vin charging stopped.


Regulation / losses: Done with battery pack model t2: Chokes 2x 4.7uHy 1mm high

Vin Volts	Iin mA	Vout1 Volts	Iout1 mA	Model	Losses in mW**	Efficiency %
11.03	217	3.640	493	t2	599	75.0
11.03	218	3.675	492	t2	596	75.2
11.03	222	3.753	492	t2	602	75.4
11.03	224	3.799	492	t2	602	75.7
11.03	224	3.807	491.5	t2	600	75.7
5.00	461	3.878	492.5	t2	395	82.9
11.07	225	3.880	492	t2	582	76.6
5.015	470	3.982	492	t2	398	83.1
11.07	230	3.981	491	t2	591	76.8
5.01	474	4.027	492	t2	393	83.4
11.01	233	4.027	492	t2	584	77.2
5.02	476	4.074	492	t2	385	83.9
11.01	235	4.073	491	t2	588	77.3
10.99	237	4.184	483	t1	584	77.6
10.99	239	4.169	489	t1	588	77.6
10.99	124	4.204	230	t1	396	71.0

Hot spot: The chokes at 55 degrees C for 11Vin and 483mA load at 4.184Vout.
Ambient was at about 23-25 degrees Celsius and there was no added airflow.
Same hot spot and 55 degrees C seen in both models t1 and t2.


Ripple out at main connector: 11Vin and max power out:

27-Jan-10
19:56:15

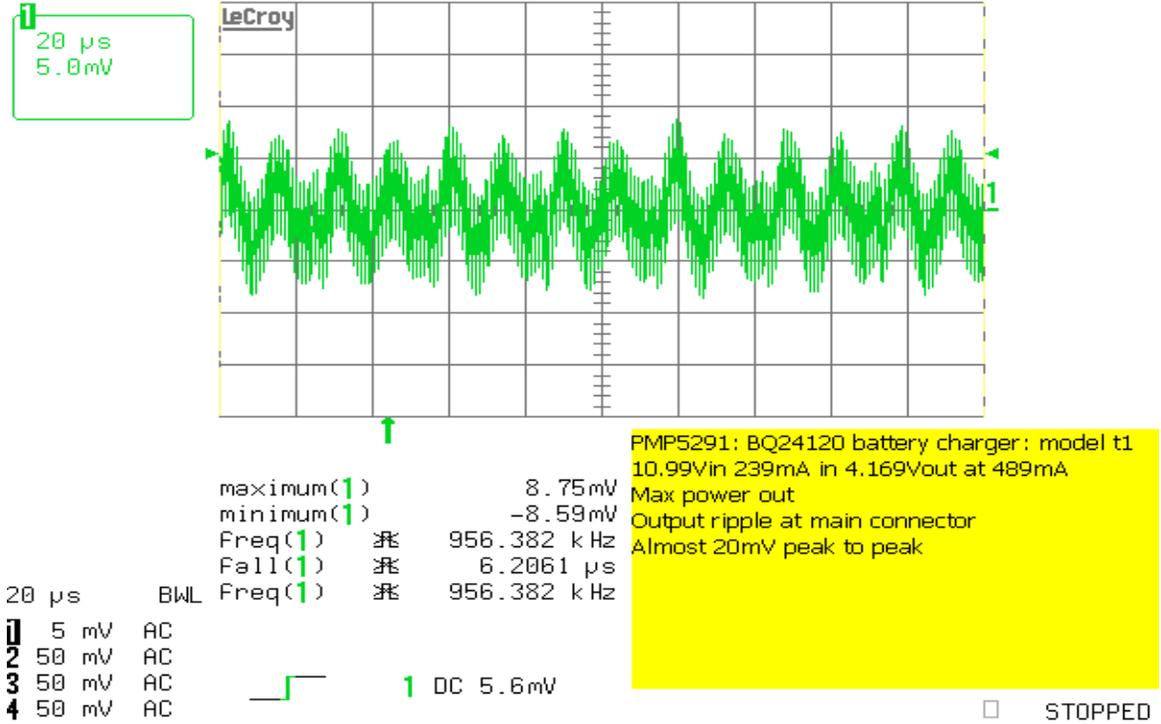


Same input and output, but ripple measured at output cap C6:

27-Jan-10
19:57:11

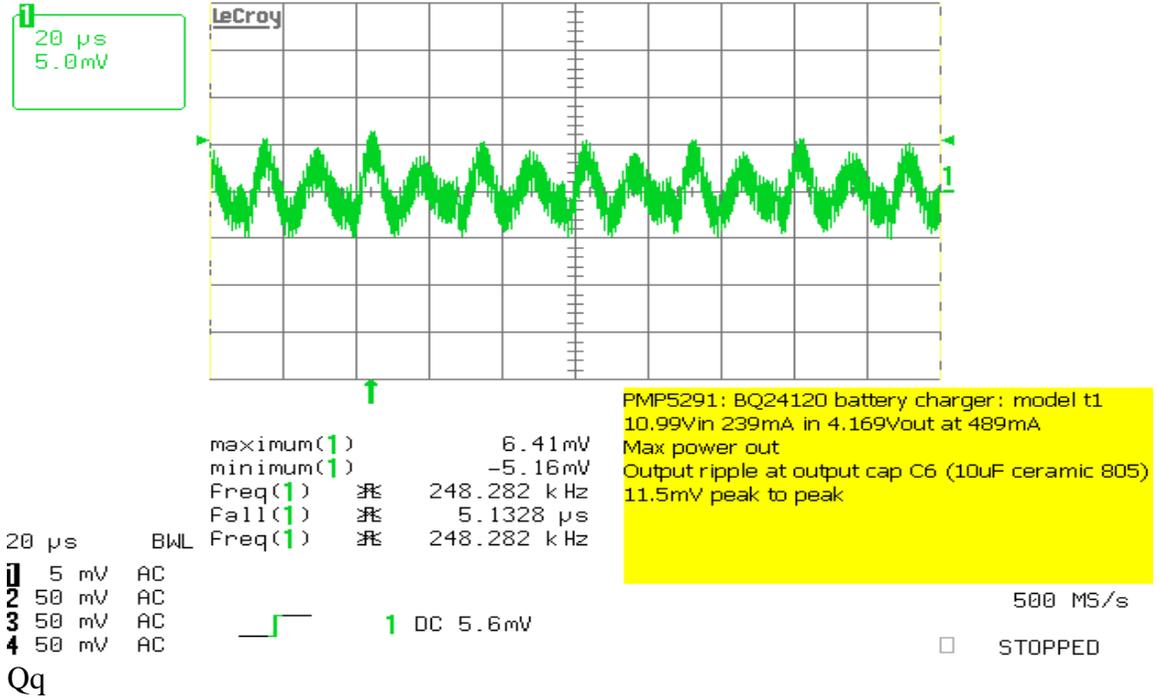

Major waveform: 11Vin max Charging power out:


27-Jan-10
19:29:18

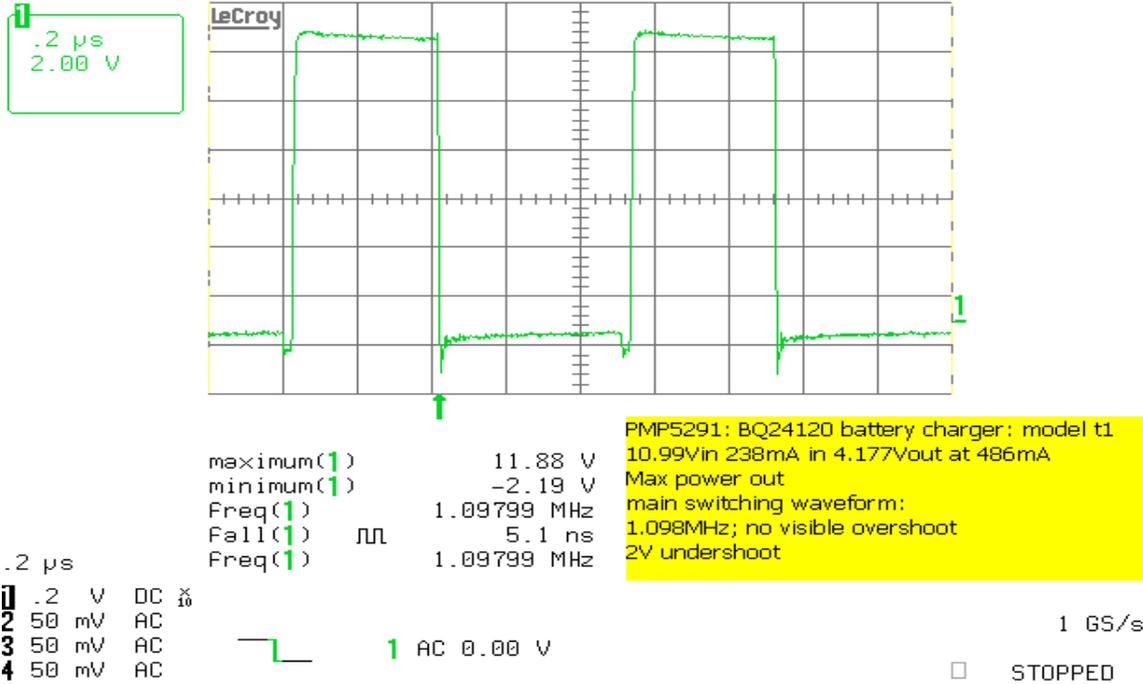

Qq

Rising waveform for same shown:

27-Jan-10
19:31:53

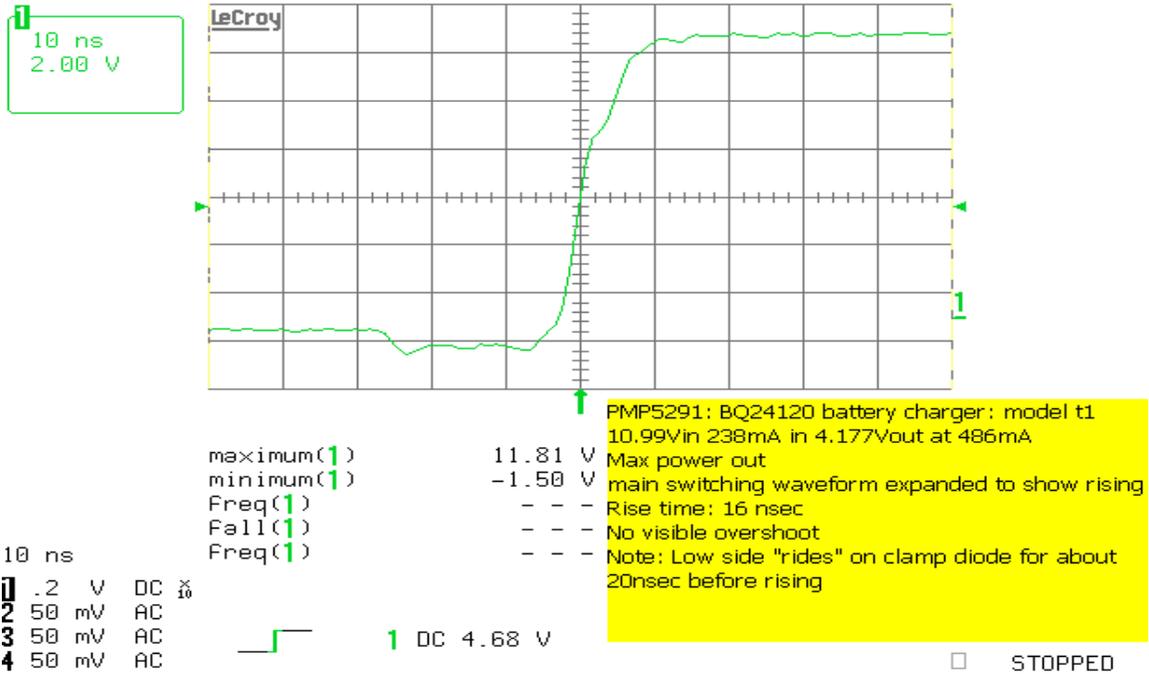


Major waveform: 5Vin before snubber added:

Falling waveform detail for same: 11Vin, max power out:

27-Jan-10
19:30:05

5 ns
2.00 V

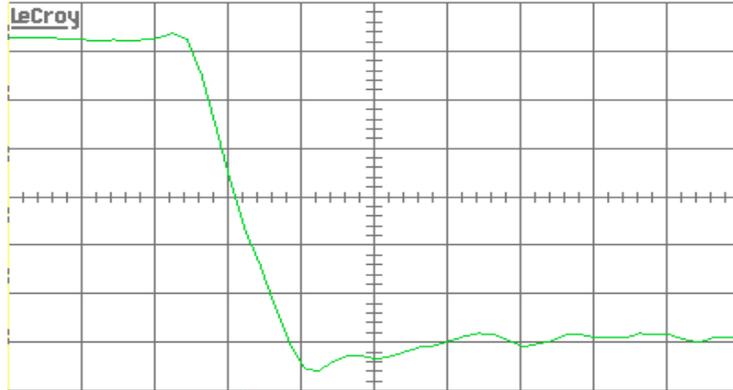

maximum(1) 11.75 V
minimum(1) -2.13 V
Freq(1) - - -
Fall(1) 5.2 ns
Freq(1) - - -

PMP5291: BQ24120 battery charger: model t1
10.99Vin 238mA in 4.177Vout at 486mA
Max power out
main switching waveform expanded to show falling:
Fall time: 10 nsec
1.098MHz: >2V undershoot

5 ns
1 .2 V DC \times
2 50 mV AC
3 50 mV AC
4 50 mV AC

1 AC 0.00 V

1 GS/s


STOPPED

Qq

Major waveform at load about half the max:

27-Jan-10
19:32:57

.2 μ s
2.00 V

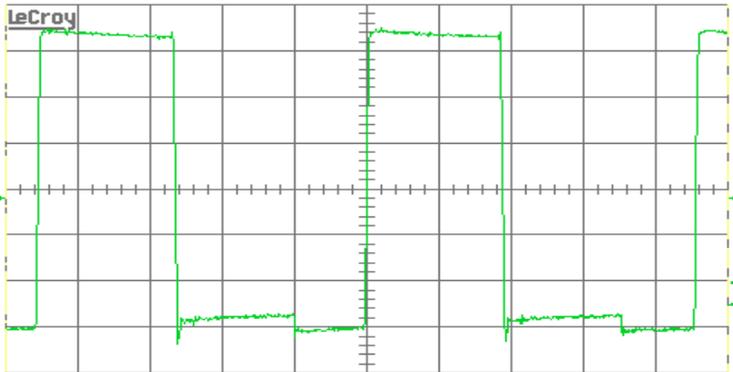

maximum(1) 12.00 V
minimum(1) -1.75 V
Freq(1) \square 1.09737 MHz
Fall(1) \square 9.5 ns
Freq(1) \square 1.09737 MHz

PMP5291: BQ24120 battery charger: model t1
10.99Vin 124mA in 4.204Vout at 230mA
About half power out: 2x 4.7uHy chokes
main switching waveform:
same 1.098MHz
Low side FET turns off during conduction and choke current flows thru "clamp diode" for last 200nsec
This is a feature in BQ24120 to shut off low side FET at light loads


.2 μ s
1 .2 V DC \times
2 50 mV AC
3 50 mV AC
4 50 mV AC

1 DC 4.68 V

STOPPED

Finally, main waveform at load just before charging terminates:


27-Jan-10
19:48:08

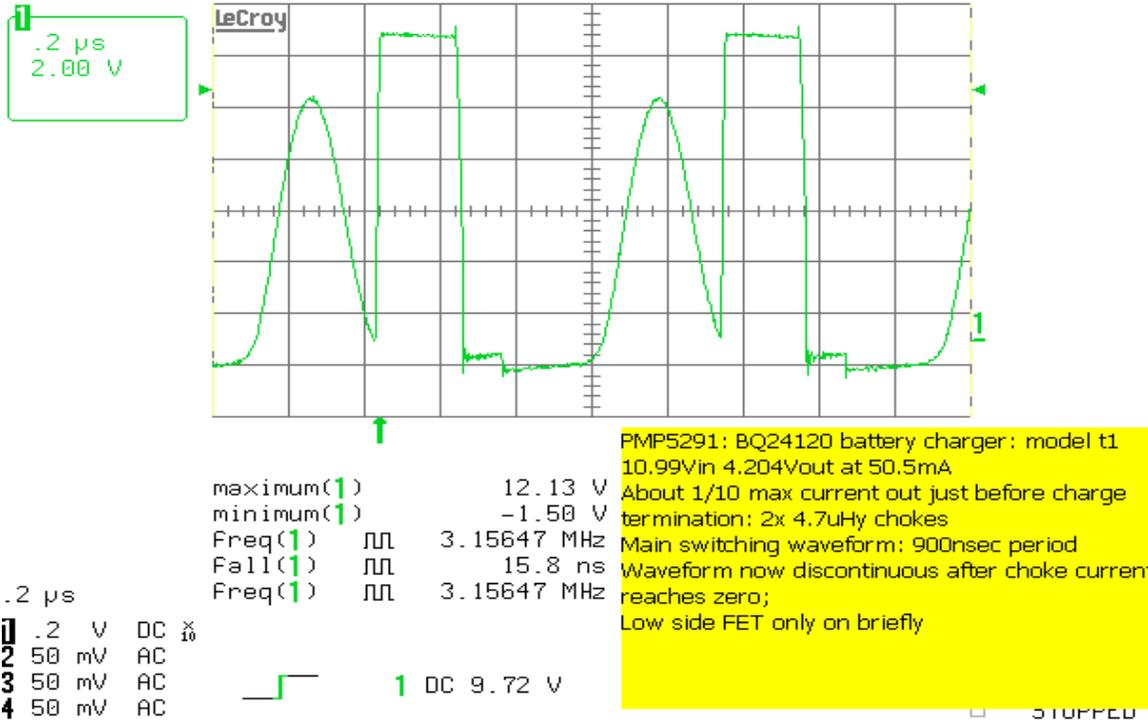

Qq

Model t2 major waveform as model t1 shipped quickly:

28-Jan-10
12:59:01

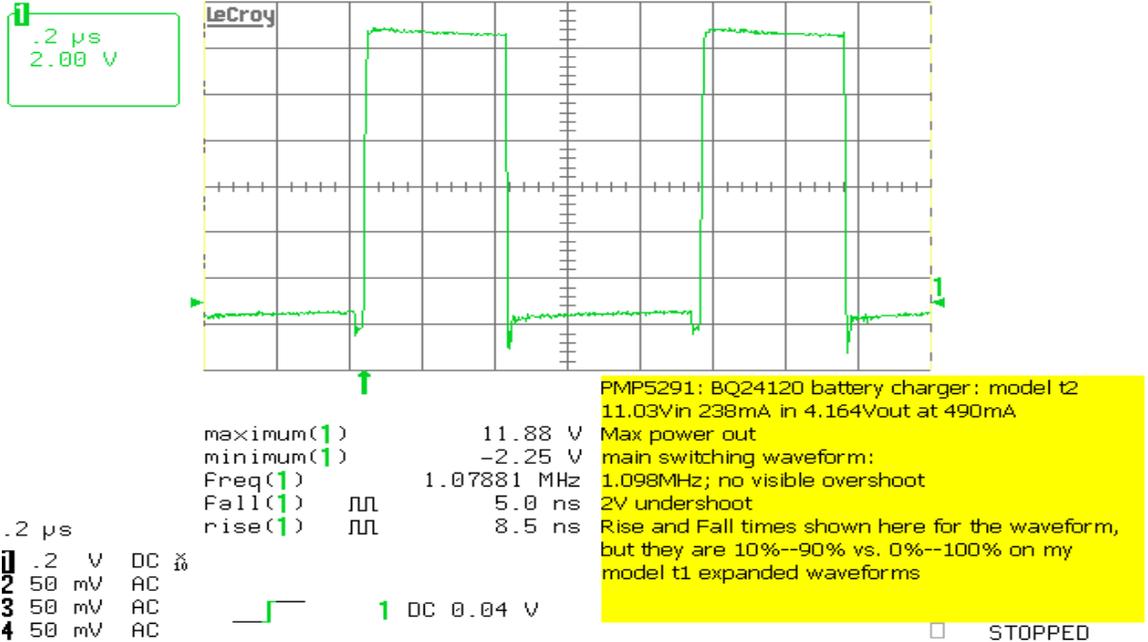


Qq

Main waveform notes: critical conduction current with 11Vin, Fsw=1.098MHz, 2x4.7uHy chokes was about 130mA at 4.204Vout

At Vin going below 4.71V and Vout at 4.18V and current at 488mA; duty cycle reaches 100%. Drop across Hi side FET about 150mV, across sense resistor 100mV, and across the two 4.7uHy chokes the remaining 270mV.


Charge terminates very close to target 50mA both on models t1 and t2 as shown here:

28-Jan-10
16:07:04

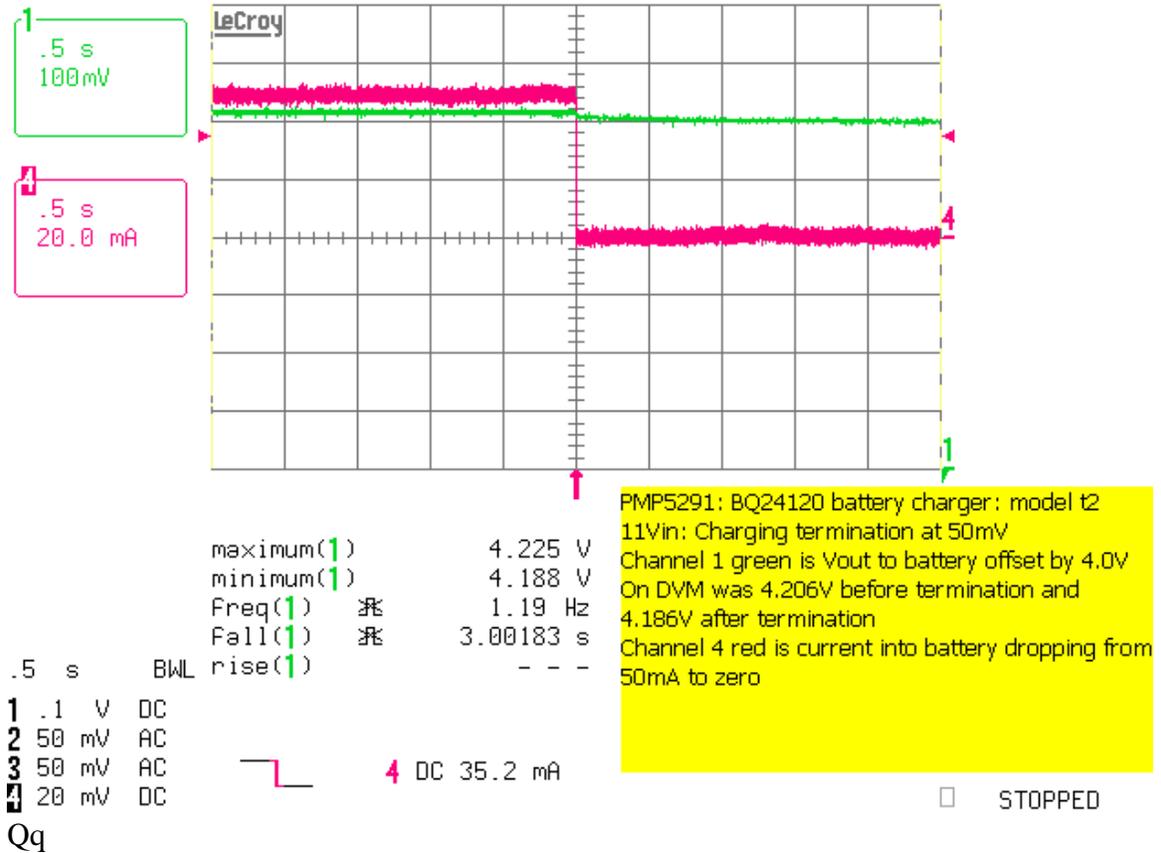


ReStart after battery voltage drops about 100mV due to 360mA load across battery:

28-Jan-10
16:09:43

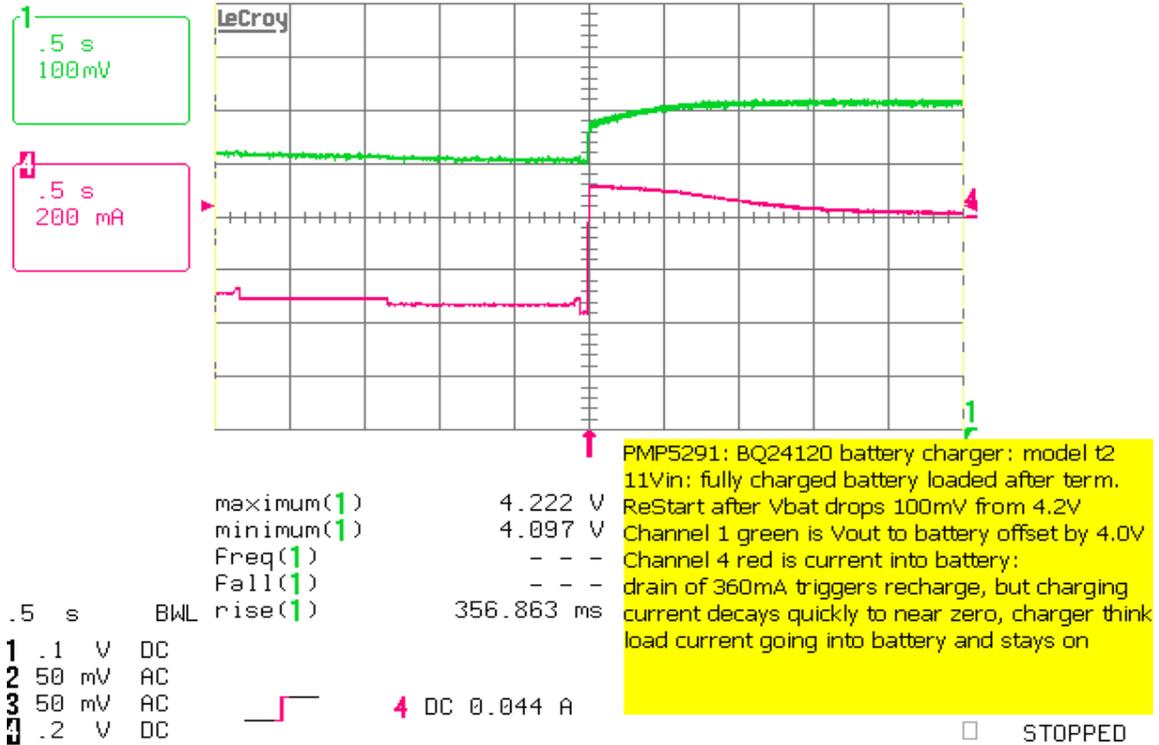


Charger output with no battery: Pulses on and off until it detects an actual battery:

28-Jan-10
16:13:17

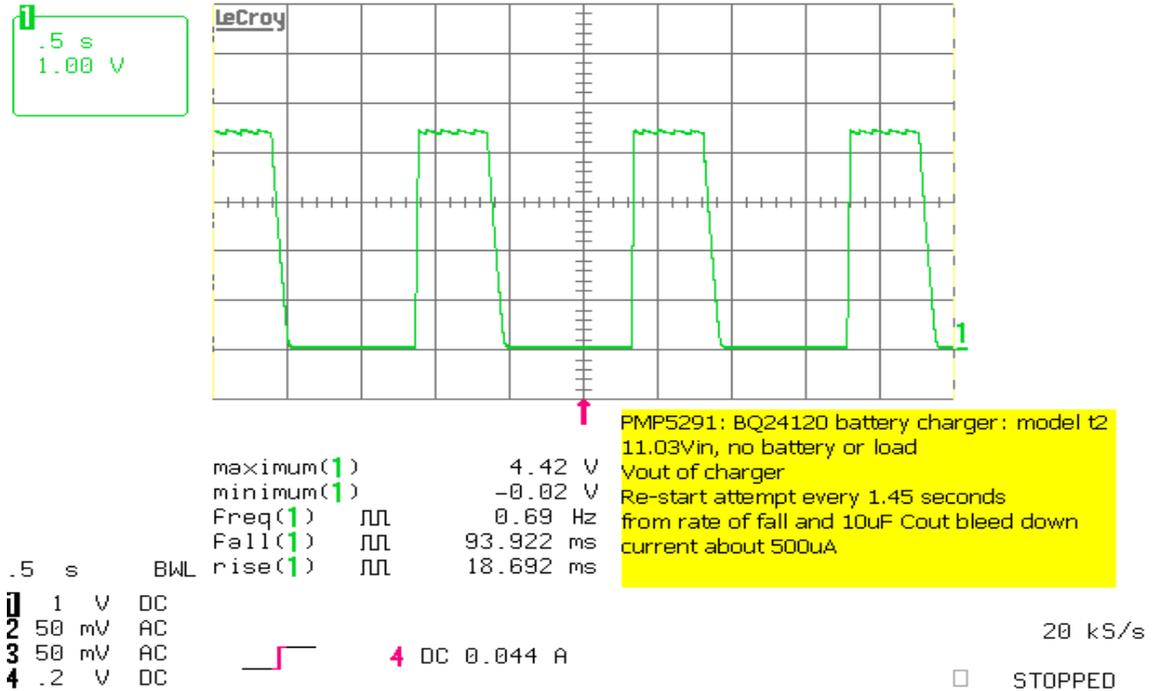

Qq

Start of normal full charged when mostly discharged battery pack plugged into charger:
 28-Jan-10 Reading Floppy Disk Drive
 19:54:01

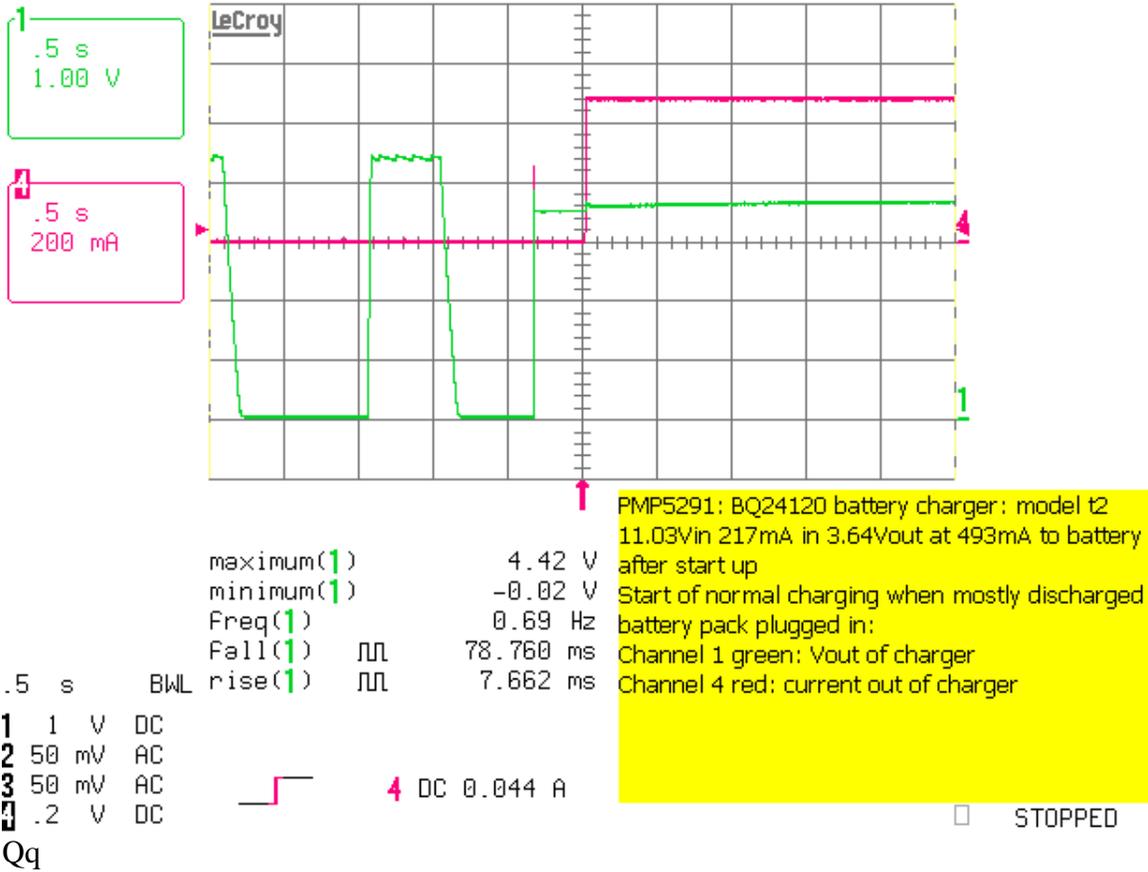

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2021, Texas Instruments Incorporated