

TLV320AIC1106EVM-K

This user's guide describes the characteristics, operation, and use of the TLV320AIC1106EVM-K evaluation module. A complete circuit description, schematic diagram, and bill of materials are included. Note that this evaluation module (EVM) is not provided with a graphical user interface; the USB is used only for powering up the EVM.

Contents

1	EVM Overview	2
2	Analog Interface	2
3	Digital Interface	3
4	Power Supplies	5
5	EVM Operation	5
6	Kit Operation	6
7	EVM Bill of Materials	9
Appendix A	TLV320AIC1106EVM Schematic	12
Appendix B	USB-MODEVM Schematic	13

List of Figures

1	TLV320AIC1106EVM-K Block Diagram.....	7
---	---------------------------------------	---

List of Tables

1	Analog Interface Pinout	2
2	Alternate Analog Connectors	3
3	Digital Interface Pinout	3
4	Power Supply Pinout	5
5	List of Jumpers	6
6	USB-MODEVM SW2 Settings.....	8
7	TLV320AIC1106EVM Bill of Materials	9
8	USB-MODEVM Bill of Materials	10

1 EVM Overview

1.1 Features

- Full-featured evaluation board for the TLV320AIC1106 audio codec
- Selectable 13-bit linear or 8 bit μ -law companded conversion
- Differential microphone input with external gain setting
- Differential earphone output capable of driving a 32- Ω to 8- Ω load
- Microphone (MIC) and earphone (EAR) mute functions
- 2.048-MHz master clock rate
- Easy interfacing to multiple analog sources
- Analog output signals from the TLV320AIC1106 are available on top and bottom connectors.
- External microphone jack and electric microphone are included
- Digital control signals can be applied directly to top and bottom connectors

1.2 Introduction

The TLV320AIC1106EVM-K is a complete evaluation/demonstration kit, which includes a USB-based motherboard called the USB-MODEVM Interface board. Provisions are made for connecting all audio inputs and outputs either from the modular connectors or with onboard terminals and external microphone jack. An onboard electret microphone is also provided.

2 Analog Interface

For maximum flexibility, the TLV320AIC1106EVM is designed for easy interfacing to multiple analog sources. Samtec part numbers SSW-110-22-F-D-VS-K and TSM-110-01-T-DV-P provide a convenient 10-pin, dual-row, header/socket combination. These headers/sockets provide access to the analog input and output pins of the device. [Table 1](#) summarizes the analog interface pinout for the TLV320AIC1106EVM.

Table 1. Analog Interface Pinout

Pin Number	Signal	Description
J1.1	EAROUT-	Earphone amplifier negative output
J1.2	EAROUT+	Earphone amplifier positive output
J1.3	NC	Not connected
J1.4	NC	Not connected
J1.5	NC	Not connected
J1.6	NC	Not connected
J1.7	NC	Not connected
J1.8	NC	Not connected
J1.9	AGND	Analog ground
J1.10	NC	Not connected
J1.11	AGND	Analog ground
J1.12	NC	Not connected
J1.13	AGND	Analog ground
J1.14	NC	Not connected
J1.15	NC	Not connected
J1.16	NC	Not connected
J1.17	AGND	Analog ground
J1.18	NC	Not connected
J1.19	AGND	Analog ground
J1.20	NC	Not connected
J2-1	NC	Not connected

Table 1. Analog Interface Pinout (continued)

Pin Number	Signal	Description
J2-2	NC	Not connected
J2-3	NC	Not connected
J2-4	NC	Not connected
J2-5	NC	Not connected
J2-6	NC	Not connected
J2-7	MIC-	ADC inverting input
J2-8	MIC+	ADC noninverting input
J2-9	AGND	Analog ground
J2-10	NC	Not connected
J2-11	AGND	Analog ground
J2-12	NC	Not connected
J2-13	AGND	Analog ground
J2-14	NC	Not connected
J2-15	NC	Not connected
J2-16	NC	Not connected
J2-17	AGND	Analog ground
J2-18	NC	Not connected
J2-19	AGND	Analog ground
J2-20	NC	Not connected

In addition to the analog headers, the analog inputs and outputs may also be accessed through alternate connectors, either screw terminals or audio jacks. The microphone input is tied to J9. [Table 2](#) summarizes the screw terminals available on the TLV320AIC1106EVM.

Table 2. Alternate Analog Connectors

DESIGNATOR	PIN 1	PIN 2
J6	EAROUT-	EAROUT+
J8	MICIN+	MICIN-

3 Digital Interface

The TLV320AIC1106EVM is designed to interface easily with multiple control platforms. Samtec part numbers SSW-110-22-F-D-VS-K and TSM-110-01-T-DV-P provide a convenient 10-pin, dual-row, header/socket combination. These headers/sockets provide access to the digital control and serial data pins of the device. [Table 3](#) summarizes the digital interface pinout for the TLV320AIC1106EVM.

Table 3. Digital Interface Pinout

PIN NUMBER	SIGNAL	DESCRIPTION
J3.1	NC	Not connected
J3.2	NC	Not connected
J3.3	NC	Not connected
J3.4	DGND	Digital ground
J3.5	NC	Not connected
J3.6	NC	Not connected
J3.7	NC	Not connected
J3.8	RESET	Reset signal input
J3.9	NC	Not connected
J3.10	DGND	Digital ground
J3.11	NC	Not connected

Table 3. Digital Interface Pinout (continued)

PIN NUMBER	SIGNAL	DESCRIPTION
J3.12	NC	Not connected
J3.13	NC	Not connected
J3.14	RESET	Reset signal input
J3.15	NC	Not connected
J3.16	NC	Not connected
J3.17	NC	Not connected
J3.18	DGND	Digital ground
J3.19	NC	Not connected
J3.20	NC	Not connected
J4.1	NC	Not connected
J4.2	NC	Not connected
J4.3	SCLK	Audio serial data shift clock (input/output)
J4.4	DGND	Digital ground
J4.5	NC	Not connected
J4.6	NC	Not connected
J4.7	FS1	Audio serial data bus frame synchronization (input/output)
J4.8	NC	Not connected
J4.9	NC	Not connected
J4.10	DGND	Digital ground
J4.11	DIN	Audio serial data bus data Input (input)
J4.12	NC	Not connected
J4.13	DOUT	Audio serial data bus data output (output)
J4.14	NC	Not connected
J4.15	NC	Not connected
J4.16	NC	Not connected
J4.17	MCLK	Master clock input
J4.18	DGND	Digital ground
J4.19	NC	Not connected
J4.20	NC	Not connected

4 Power Supplies

J5 provides connection to the common power bus for the TLV320AIC1106EVM. Power is supplied on the pins listed in [Table 4](#).

Table 4. Power Supply Pinout

PIN NUMBER	Signal	Description
J5.1	NC	Not connected
J5.2	NC	Not connected
J5.3	5VA	5-V analog
J5.4	NC	Not connected
J5.5	DGND	Digital ground
J5.6	AGND	Analog ground
J5.7	NC	Not connected
J5.8	NC	Not connected
J5.9	3.3VD	3.3-volt digital
J5.10	NC	Not connected

The TLV320AIC1106EVM-K motherboard (the USB-MODEVM Interface board) supplies power to J5 of the TLV320AIC1106EVM. Power for the motherboard is supplied either through its USB connection or via terminal blocks on that board.

4.1 Stand-Alone Operation

When used as a stand-alone EVM, power can be applied directly to J5. The user must be sure to reference the supplies to the appropriate grounds on that connector.

CAUTION

Verify that all power supplies are within the safe operating limits shown on the product data sheet before applying power to the EVM.

4.2 USB-MODEVM Interface Power

The USB-MODEVM Interface board can be powered from several different sources:

- USB
- 6-Vdc to 10-Vdc ac/dc external wall supply (not included)
- Laboratory power supply

When powered from the USB connection, JMP6 must have a shunt from pins 1–2 (this is the default factory configuration). When powered from 6 V to 10 Vdc, either through the J8 terminal block or the J9 barrel jack, JMP6 must have a shunt installed on pins 2-3. If power is applied in any of these ways, onboard regulators generate the required supply voltages, and no further power supplies are necessary.

If laboratory supplies are used to provide the individual voltages required by the USB-MODEVM Interface, JMP6 must have no shunt installed. Voltages are then applied to J2 (+5VA), J3 (+5VD), J4 (+1.8VD), and J5 (+3.3VD). The +1.8VD and +3.3VD can also be generated on the board by the onboard regulators from the +5VD supply; to enable this configuration, the switches on SW1 need to be set to enable the regulators by placing them in the ON position (lower position, looking at the board with text reading right-side up). If +1.8VD and +3.3VD are supplied externally, disable the onboard regulators by placing SW1 switches in the OFF position.

Each power supply voltage has an LED (D1-D7) that lights when the power supplies are active.

5 EVM Operation

This section provides information on the analog input and output, digital control, and general operating conditions for the TLV320AIC1106EVM.

5.1 Analog Input

The analog input sources can be applied directly to J2 (top or bottom side). The analog inputs may also be accessed through J7 and screw terminal J8.

5.2 Analog Output

The analog outputs from the TLV320AIC1106 are available on J1 (top or bottom). They also may be accessed through J6.

5.3 Default Jumper Locations

Table 5 lists the jumpers found on the EVM and their respective factory default conditions.

Table 5. List of Jumpers

JUMPER	DEFAULT POSITION	JUMPER DESCRIPTION
W1	Not installed	Coupling for EAR. Either directly or via capacitor
W2	Installed	Connects EARVDD to 3.3VA
W3	Not installed	Connecting J7 through MK1
W4	Installed	Connecting left of J7 to MIC-
W5	Not installed	Adjusting MIC5 gain resistance
W6	Not installed	Adjusting MIC5 gain resistance
W7	2 to 3	Unmute/mute MIC
W8	2 to 3	Unmute/mute EAROUT
W9	Not installed	Selecting MCLK from MCLK input
W10	Installed	Selecting MCLK from SCLK input
W11	Installed	Connecting DVDD with 3.3VD
W12	2 to 3	/LINSEL Select

6 Kit Operation

This section provides information on using the TLV320AIC1106EVM-K, including setup, program installation, and program usage.

6.1 TLV320AIC1106EVM-K Block Diagram

A block diagram of the TLV320AIC1106EVM-K is shown in Figure 1. The evaluation kit consists of two circuit boards connected together. The motherboard is designated as the USB-MODEVM Interface board, whereas the daughterboard is the TLV320AIC1106EVM described previously in this manual.

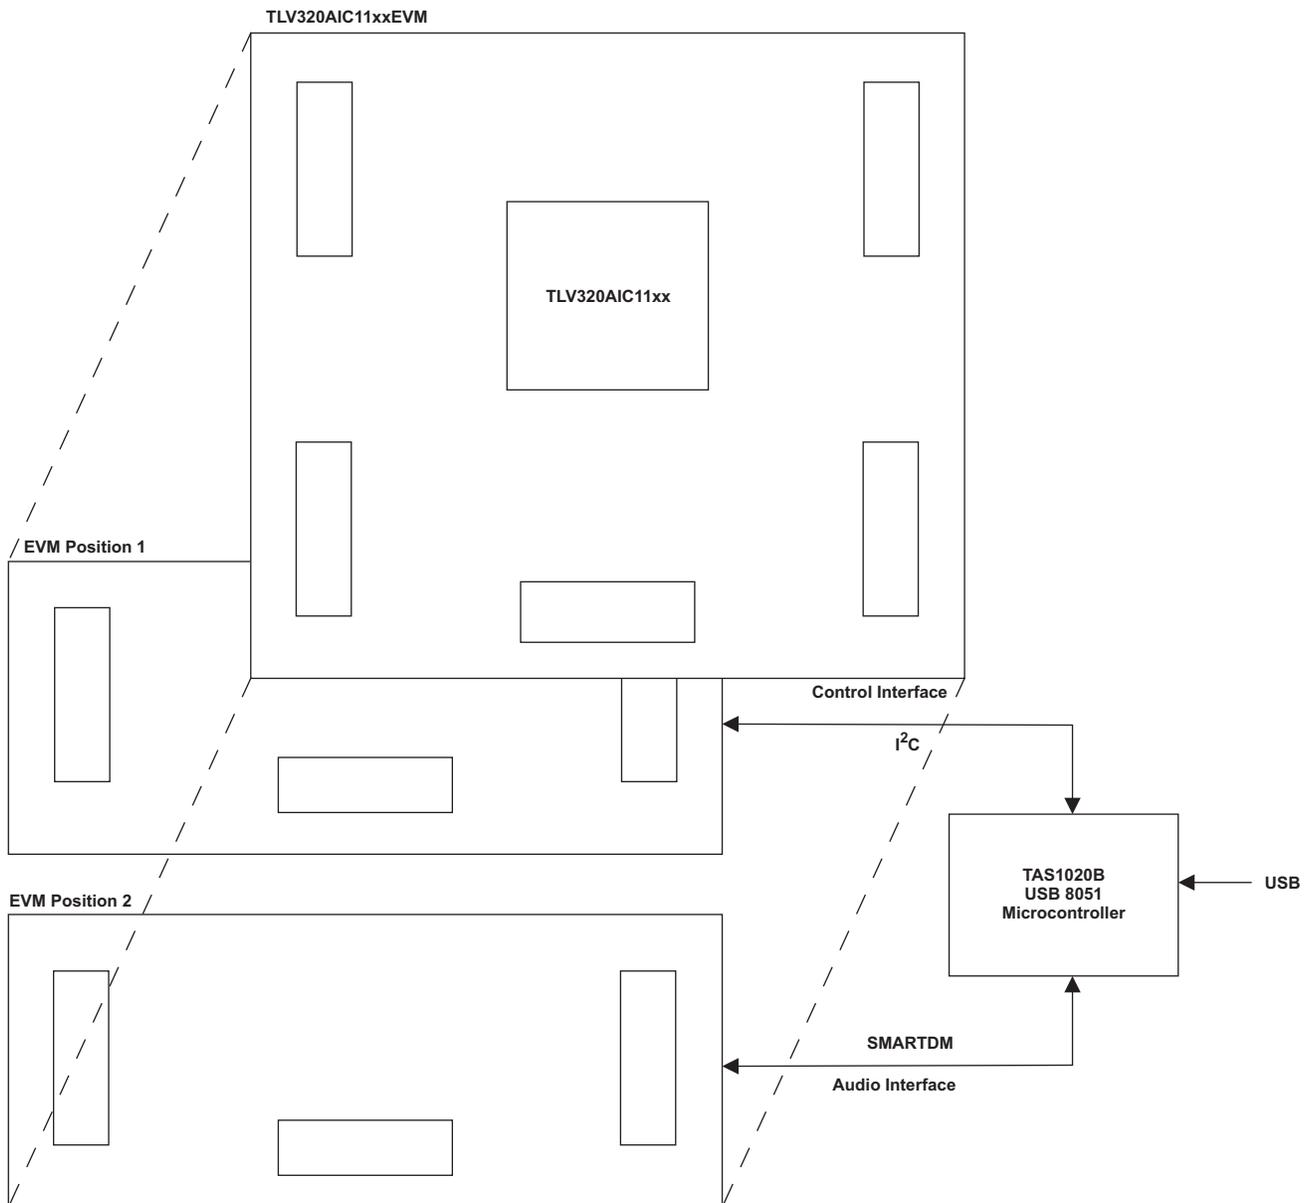


Figure 1. TLV320AIC1106EVM-K Block Diagram

The USB-MODEVM Interface board is intended to be used in USB mode, where control of the installed EVM is accomplished using the onboard USB controller device. Provision is made, however, for driving all the data buses (I²C™, PCM/ SMARTDM™) externally. The source of these signals is controlled by SW2 on the USB-MODEVM. Refer to [Table 6](#) for details on the switch settings.

Additionally, SW3 on the USB-MODEVM (IOVDD SELECT) must be set up to 3.3V (SW3 position 1 on, SW3 positions 2-8 off).

Table 6. USB-MODEVM SW2 Settings

SW-2 SWITCH NUMBER	LABEL	SWITCH DESCRIPTION
1	A0	USB-MODEVM EEPROM I ² C Address A0 ON: A0 = 0 OFF: A0 = 1
2	A1	USB-MODEVM EEPROM I ² C Address A1 ON: A1 = 0 OFF: A1 = 1
3	A2	USB-MODEVM EEPROM I ² C Address A2 ON: A2 = 0 OFF: A2 = 1
4	USB I ² S	Digital Audio Bus Source Selection ON: Digital Audio Bus connects to TAS1020 OFF: Digital Audio Bus connects to USB-MODEVM J14
5	USB MCK	Digital Audio Bus MCLK Source Selection ON: MCLK connects to TAS1020 OFF: MCLK connects to USB-MODEVM J14
6	USB SPI	SPI Bus Source Selection ON: SPI Bus connects to TAS1020 OFF: SPI Bus connects to USB-MODEVM J15
7	USB RST	RST Source Selection ON: EVM Reset Signal comes from TAS1020 OFF: EVM Reset Signal comes from USB-MODEVM J15
8	EXT MCK	External MCLK Selection ON: MCLK Signal is provided from USB-MODEVM J10 OFF: MCLK Signal comes from either selection of SW2-5

For use with the TLV320AIC1106EVM, set SW-2 positions 1, 3, 6, and 7 to ON; set SW-2 positions 2, 4, 5, and 8 to OFF.

7 EVM Bill of Materials

Table 7 and Table 8 contain a complete bill of materials for the modular TLV320AIC1106EVM and the USB-MODEVM Interface board.

Table 7. TLV320AIC1106EVM Bill of Materials

Reference Designator	Description	Manufacturer	Mfr Part Number
U1	PCM CODEC WITH MICROPHONE AMPS AND SPEAKER DRIVER, ROHS	Texas Instruments	TLV320AIC1106PW
U2	LOW POWER SINGLE POSITIVE-EDGE-TRIGGERED D-FLIP-FLOP ROHS	Texas Instruments	SN74AUP1G74DCU
U3	VOLT REG 3.3V 800mA SOT223-DCY ROHS	Texas Instruments	REG1117-3.3
MK1	ELECTRET CONDENSER MIC OMNI 1.5V -44dB ROHS	Projects Unlimited	AOM-4544P-2-R
C4,C5	CAP SMD1210 CERM 0.22UF 50V 10% X7R ROHS	AVX	12105C224KAT2A
C1,C3,C6,C7,C8,C11	CAP SMD0603 CERM 0.1UF 50V 10% X7R ROHS	TDK	C1608X7R1H104K
C2,C9,C10,C12	CAP SMD0805 CERM 10UF 10V 10% X7R ROHS	MURATA	GRM21BR71A106KE51L
R1, R2	RESISTOR SMD0603 2.00K OHM 1% THICK FILM 1/10W ROHS	PANASONIC	ERJ-3EKF2001V
R7,R8,R9,R10	RESISTOR SMD0603 10K 5% 1/10W ROHS	PANASONIC	ERJ-3GEYJ103V
R11	RESISTOR SMD1206 0.0 OHM 5% 1/4W ROHS	PANASONIC	ERJ-8GEY0R00V
R3,R4	RESISTOR,SMT,0603,THICK FILM,1%,1/10W, 34.0K	VISHAY/DALE	CRCW060334K0FKEA
R5,R6	RESISTOR,SMT,0603,THICK FILM,1%,1/10W, 511K	VISHAY/DALE	CRCW0603511KFKEA
W1,W3,W4,W5,W6,W9,W10,W14	HEADER THRU MALE 2 PIN 100LS GOLD ROHS	SULLINS	PBC02SAAN
W7,W8,W12	HEADER THRU MALE 3 PIN 100LS GOLD ROHS	SULLINS	PBC03SAAN
P3,P4	HEADER SMT 2x10 100LS TSM SERIES ROHS	SAMTEC	TSM-110-01-L-DV-P
P5	HEADER SMT 2x5 100LS TSM SERIES ROHS	SAMTEC	TSM-105-01-L-DV-P
J1,J2,J3,J4	SOCKET-HEADER SMT 2x10 100LS SSW SERIES ROHS	SAMTEC	SSW-110-22-F-D-VS-K
J5	HEADER SMT 2x5 100LS SSW SERIES ROHS	SAMTEC	SSW-105-22-F-D-VS-K
J7	JACK AUDIO MINI(3.5MM),4-COND PCB-RA ROHS	CUI STACK	SJ-43516-SMT
J6,J8	TERMINAL BLOCK 2PIN 6A/125V GRAY 3.5mm PITCH 16-28AWG ROHS	On Shore Technology	ED555/2DS
SW1	SQUARE LIGHT TOUCH SWITCH,SMT,SPST,HIGH-DENSITY, SPACE SAVING	PANASONIC	EVQ5PN05K
TP1,TP2,TP3,TP4,TP5,TP6,TP7,TP8,TP9,TP10,TP11,TP12,TP13,TP14,TP15,TP16,TP17,TP18,TP19	PC TESTPOINT, WHITE, ROHS	Keystone electronics	5002
TP24	PC TESTPOINT, RED, ROHS	Keystone electronics	5000
TP20,TP21,TP21,T P22	PC TESTPOINT BLACK 063 HOLE ROHS	Keystone electronics	5011
W2,W11	Bus Wire (18-22 Gauge)	N/A	N/A

Table 8. USB-MODEVM Bill of Materials

Designators	Description	Manufacturer	Mfg. Part Number
R4	10Ω 1/10W 5% chip resistor	Panasonic	ERJ-3GEYJ100V
R10, R11	27.4Ω 1/16W 1% chip resistor	Panasonic	ERJ-3EKF27R4V
R20	75Ω 1/4W 1% chip resistor	Panasonic	ERJ-14NF75R0U
R19	220Ω 1/10W 5% chip resistor	Panasonic	ERJ-3GEYJ221V
R14, R21, R22	390Ω 1/10W 5% chip resistor	Panasonic	ERJ-3GEYJ391V
R13	649Ω 1/16W 1% chip resistor	Panasonic	ERJ-3EKF6490V
R9	1.5kΩ 1/10W 5% chip resistor	Panasonic	ERJ-3GEYJ152V
R1, R2, R3, R5, R6, R7, R8	2.7kΩ 1/10W 5% chip resistor	Panasonic	ERJ-3GEYJ272V
R12	3.09kΩ 1/16W 1%	Panasonic	ERJ-3EKF3091V
R15, R16	10kΩ 1/10W 5%	Panasonic	ERJ-3GEYJ103V
R17, R18	100kΩ 1/10W 5%	Panasonic	ERJ-3GEYJ104V
RA1	10kΩ 1/8W Octal isolated resistor array	CTS Corporation	742C163103JTR
C18, C19	33pF 50V ceramic chip capacitor, ±5%, NPO	TDK	C1608C0G1H330J
C13, C14	47pF 50V ceramic chip capacitor, ±5%, NPO	TDK	C1608C0G1H470J
C20	100pF 50V ceramic chip capacitor, ±5%, NPO	TDK	C1608C0G1H101J
C21	1000pF 50V ceramic chip capacitor, ±5%, NPO	TDK	C1608C0G1H102J
C15	0.1μF 16V ceramic chip capacitor, ±10%, X7R	TDK	C1608X7R1C104K
C16, C17	0.33μF 16V ceramic chip capacitor, ±20%, Y5V	TDK	C1608X5R1C334K
C9, C10, C11, C12, C22, C23, C24, C25, C26, C27, C28	1μF 6.3V ceramic chip capacitor, ±10%, X5R	TDK	C1608X5R0J105K
C1, C2, C3, C4, C5, C6, C7, C8	10μF 6.3V ceramic chip capacitor, ±10%, X5R	TDK	C3216X5R0J106K
D1	50V, 1A, Diode MELF SMD	Micro Commercial Components	DL4001
D2	Yellow Light Emitting Diode	Lumex	SML-LX0603YW-TR
D3, D4, D6, D7	Green Light Emitting Diode	Lumex	SML-LX0603GW-TR
D5	Red Light Emitting Diode	Lumex	SML-LX0603IW-TR
Q1, Q2	N-Channel MOSFET	Zetex	ZXMN6A07F
X1	6MHz Crystal SMD	Epson	MA-505 6.000M-C0
U8	USB streaming controller	Texas Instruments	TAS1020BPFB
U2	5V LDO regulator	Texas Instruments	REG1117-5
U9	3.3V/1.8V dual output LDO regulator	Texas Instruments	TPS767D318PWP
U3, U4	Quad, 3-state buffers	Texas Instruments	SN74LVC125APW
U5, U6, U7	Single IC buffer driver with open drain o/p	Texas Instruments	SN74LVC1G07DBVR
U10	Single 3-state buffer	Texas Instruments	SN74LVC1G125DBVR
U1	64K 2-Wire serial EEPROM I ² C	Microchip	24LC64I/SN
	USB-MODEVM PCB	Texas Instruments	6463995
TP1, TP2, TP3, TP4, TP5, TP6, TP9, TP10, TP11	Miniature test point terminal	Keystone Electronics	5000
TP7, TP8	Multipurpose test point terminal	Keystone Electronics	5011
J7	USB type B slave connector thru-hole	Mill-Max	897-30-004-90-000000
J1, J2, J3, J4, J5, J8	2-position terminal block	On Shore Technology	ED555/2DS

Table 8. USB-MODEVM Bill of Materials (continued)

Designators	Description	Manufacturer	Mfg. Part Number
J9	2.5mm power connector	CUI Stack	PJ-102B
J10	BNC connector, female, PC mount	AMP/Tyco	414305-1
J11A, J12A, J21A, J22A	20-pin SMT plug	Samtec	TSM-110-01-L-DV-P
J11B, J12B, J21B, J22B	20-pin SMT socket	Samtec	SSW-110-22-F-D-VS-K
J13A, J23A	10-pin SMT plug	Samtec	TSM-105-01-L-DV-P
J13B, J23B	10-pin SMT socket	Samtec	SSW-105-22-F-D-VS-K
J6	4-pin double row header (2x2) 0.1"	Samtec	TSW-102-07-L-D
J14, J15	12-pin double row header (2x6) 0.1"	Samtec	TSW-106-07-L-D
JMP1–JMP4	2-position jumper, 0.1" spacing	Samtec	TSW-102-07-L-S
JMP8–JMP14	2-position jumper, 0.1" spacing	Samtec	TSW-102-07-L-S
JMP5, JMP6	3-position jumper, 0.1" spacing	Samtec	TSW-103-07-L-S
JMP7	3-position dual row jumper, 0.1" spacing	Samtec	TSW-103-07-L-D
SW1	SMT, half-pitch 2-position switch	C&K Division, ITT	TDA02H0SK1
SW2	SMT, half-pitch 8-position switch	C&K Division, ITT	TDA08H0SK1
JMP8–JMP14	2-position jumper, 0.1" spacing	Samtec	TSW-102-07-L-S


In addition to this list is a jumper plug from Samtec with manufacturer part number SNT-100-BK-T.

Appendix A TLV320AIC1106EVM Schematic


Appearing on the following pages, the schematic diagram is provided as a reference.

AIC1106_PW_EVM_REVA


USB_MODEVM (MOTHERBOARD) INTERFACE CONNECTIONS

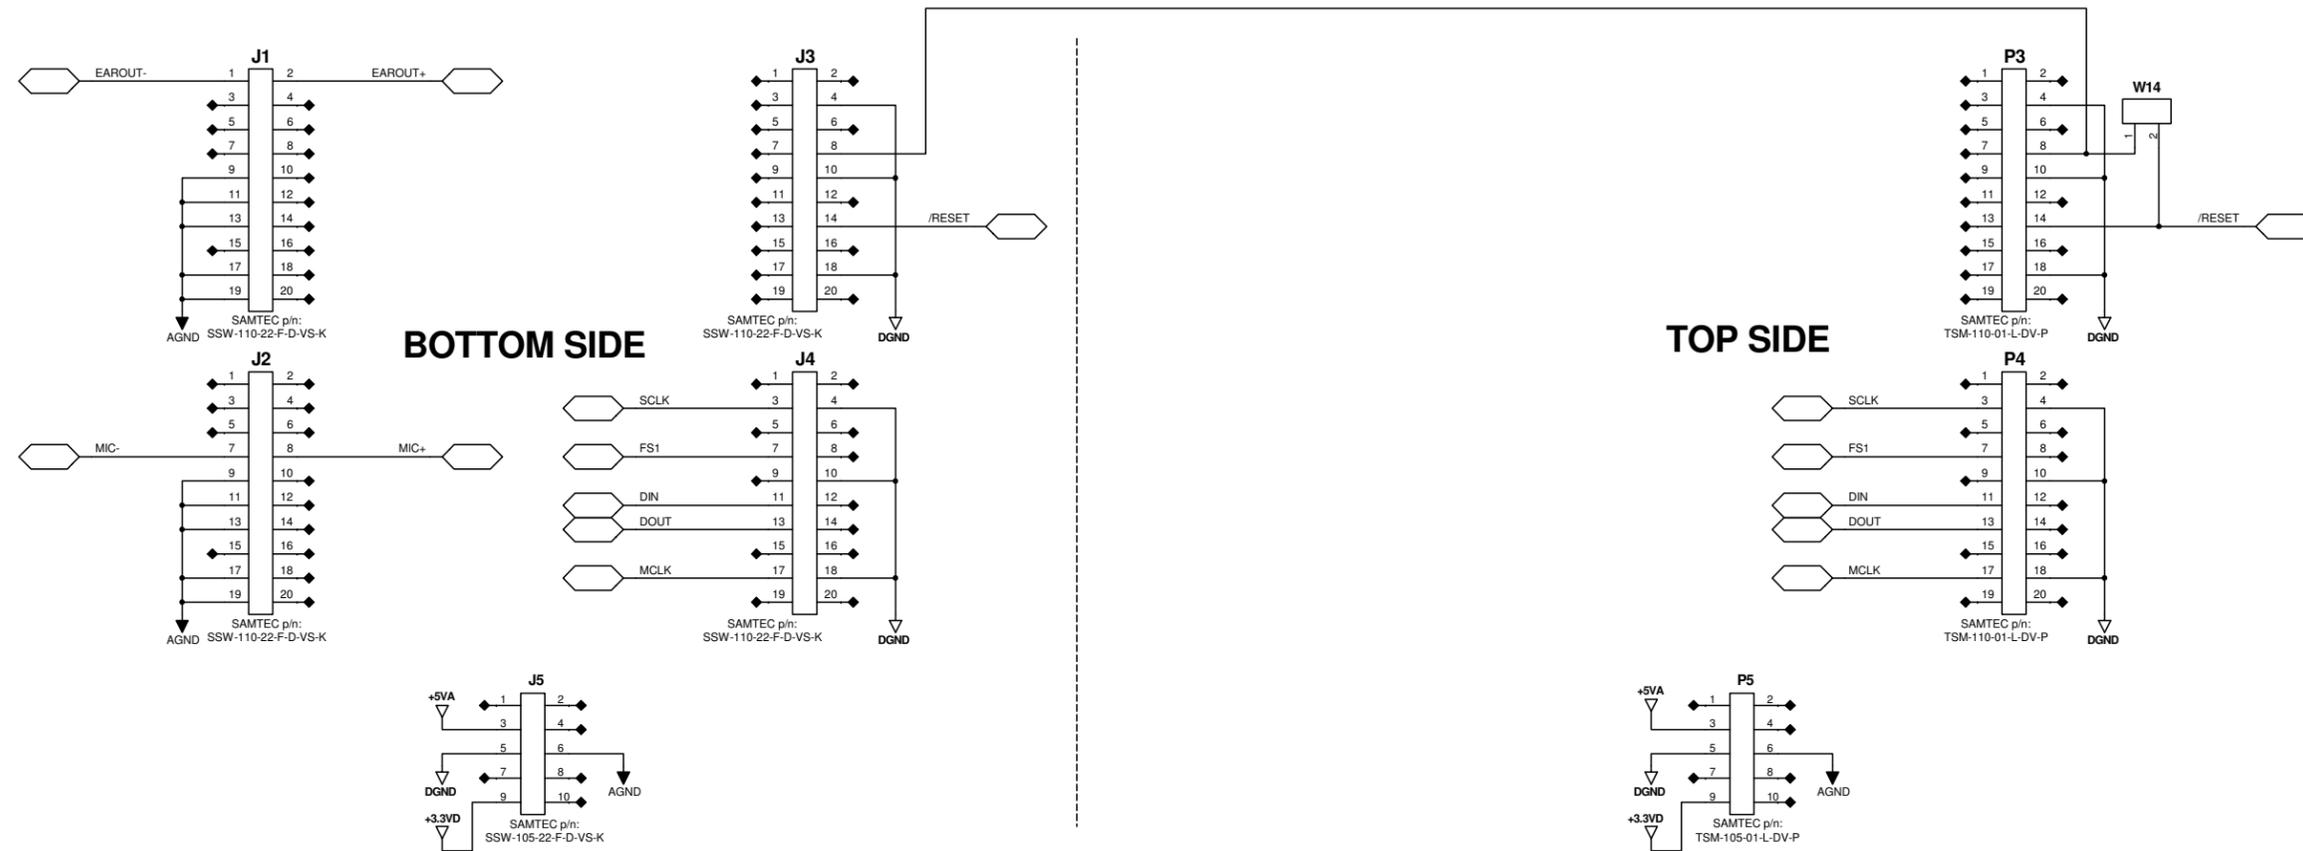

AIC1106_PW_EVM_REVA

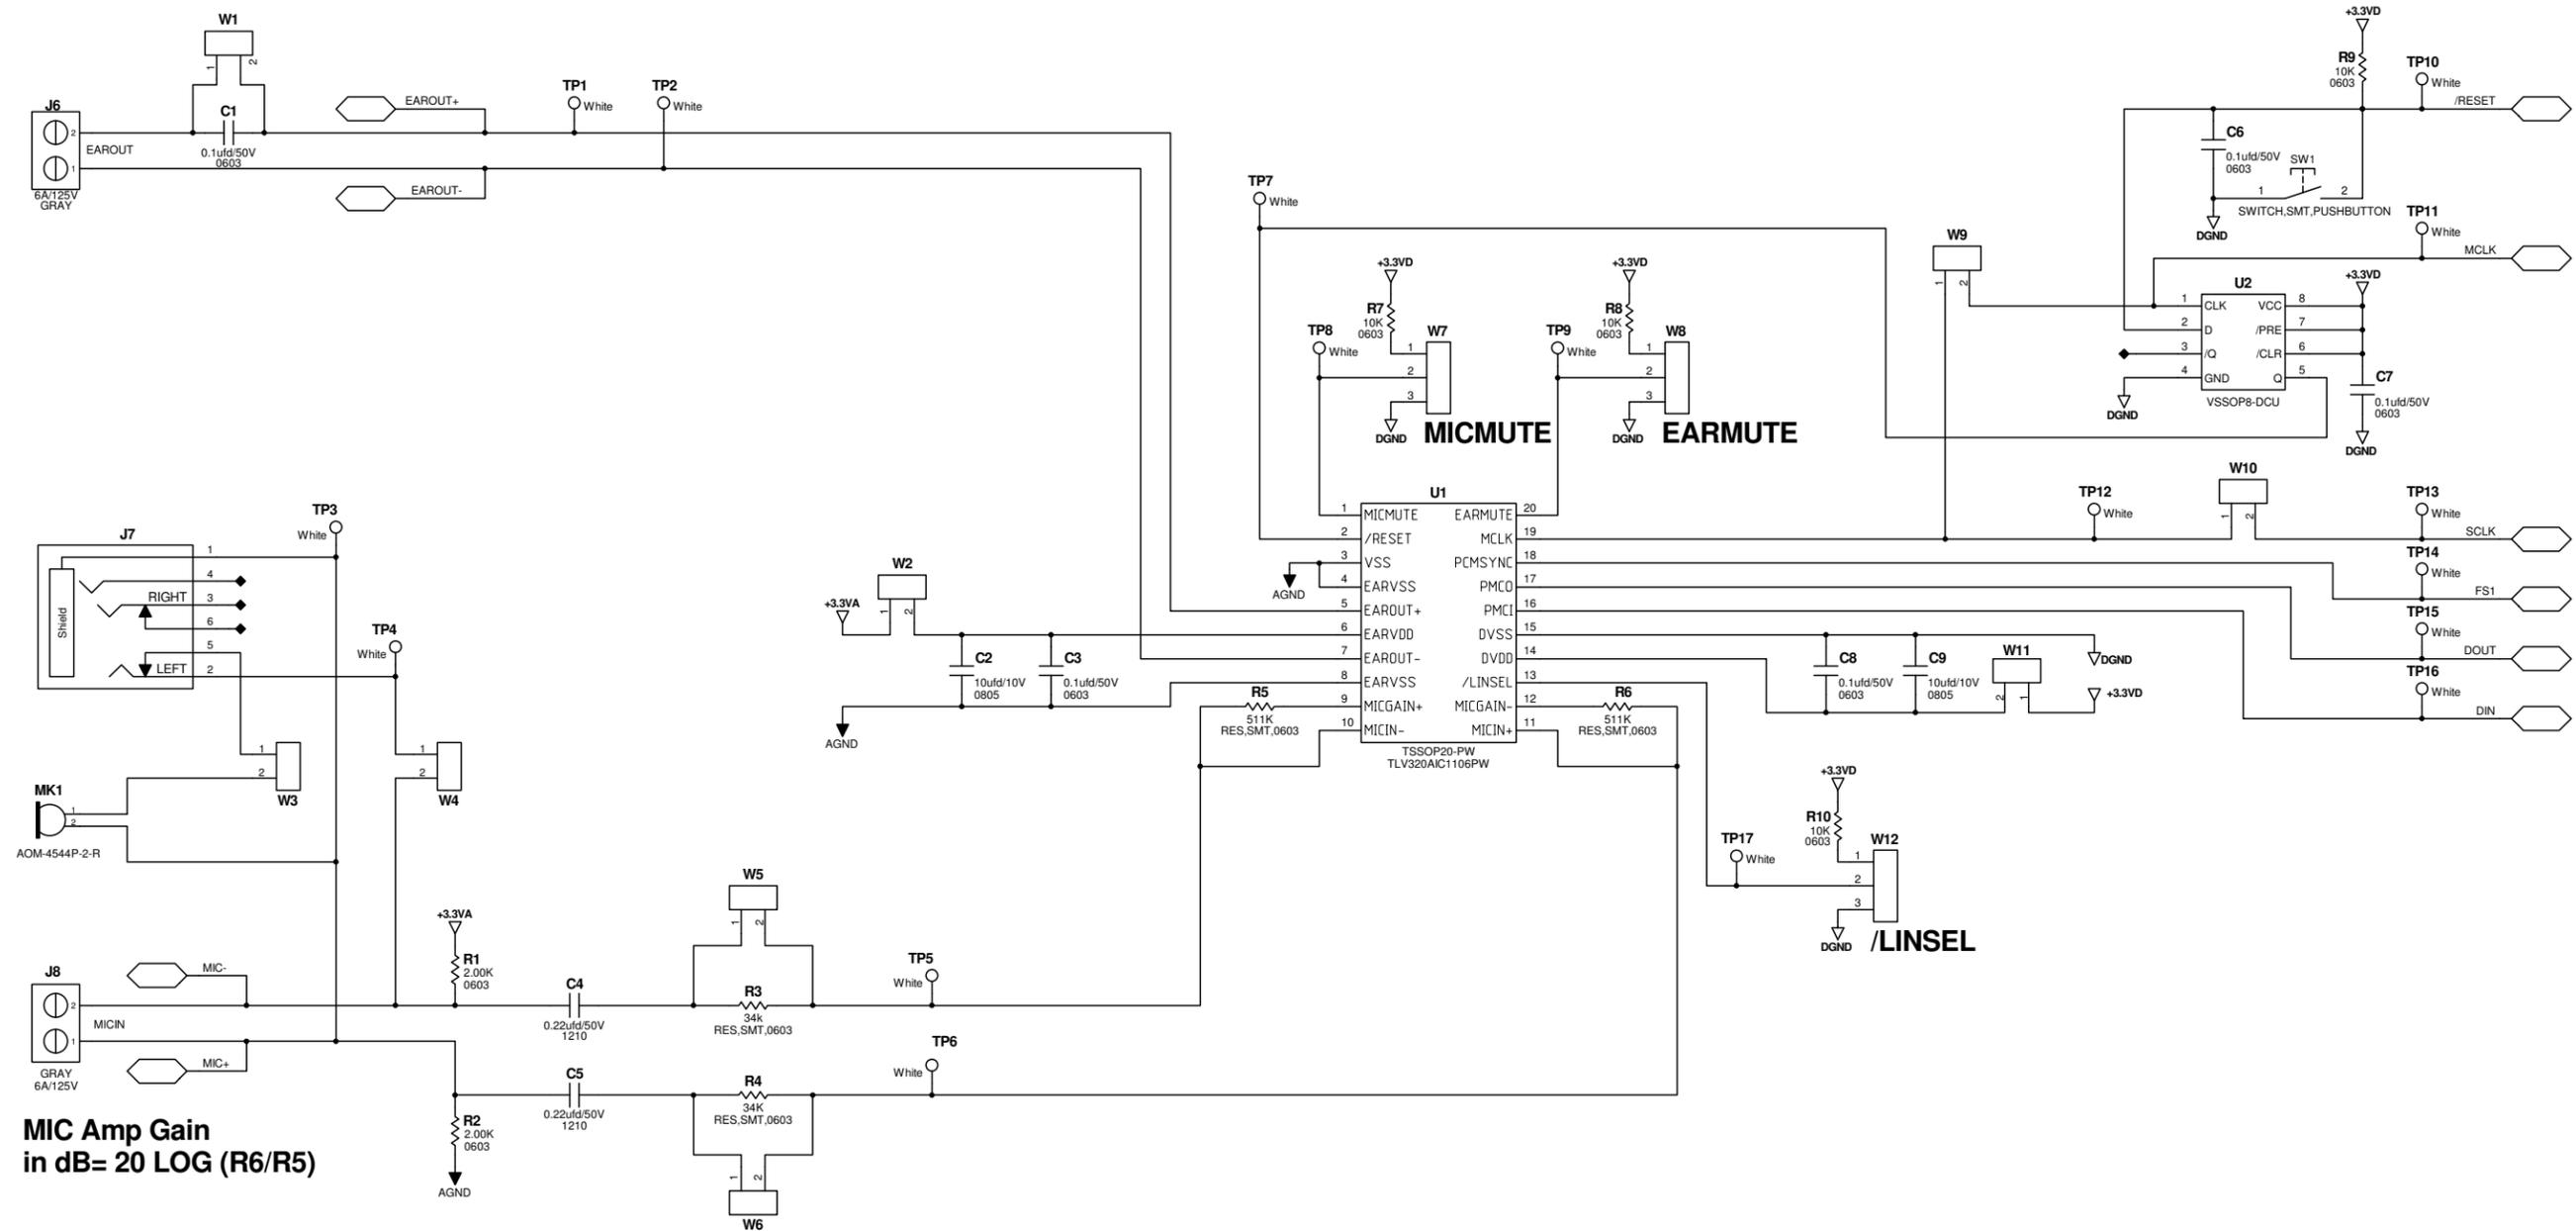


**MIC Amp Gain
in dB= 20 LOG (R6/R5)**

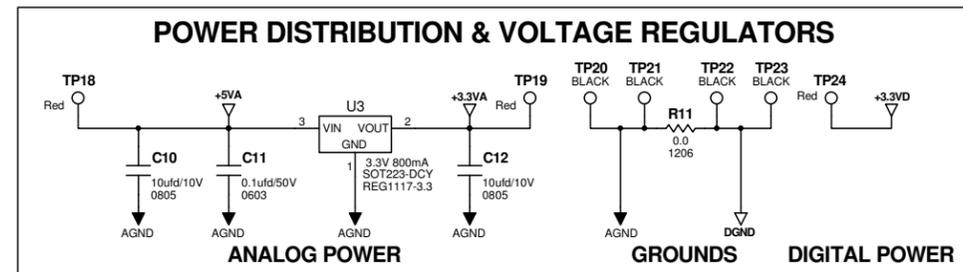

Appendix B USB-MODEVM Schematic

Appearing on the following pages, the schematic diagram is provided as a reference.



REVISION HISTORY		
REV	ENGINEERING CHANGE NUMBER	APPROVED

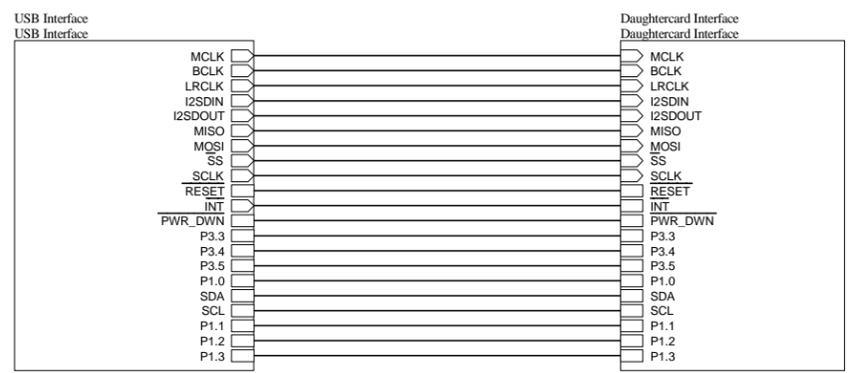

TEXAS INSTRUMENTS
 DATA ACQUISITION PRODUCTS
 HIGH-PERFORMANCE ANALOG DIVISION
 SEMICONDUCTOR GROUP
 6730 SOUTH TUCSON BLVD., TUCSON, AZ 85706 USA

ENGINEER FRYE D. ZERKETS	TITLE	
DRAWN BY L. C. SPOTTS	untitled	
DOCUMENT CONTROL NO.1234567	SIZE B	DATE dd MMM yyyy
SHEET 1 OF 1	FILE ???	REV A

REVISION HISTORY		
REV	ENGINEERING CHANGE NUMBER	APPROVED

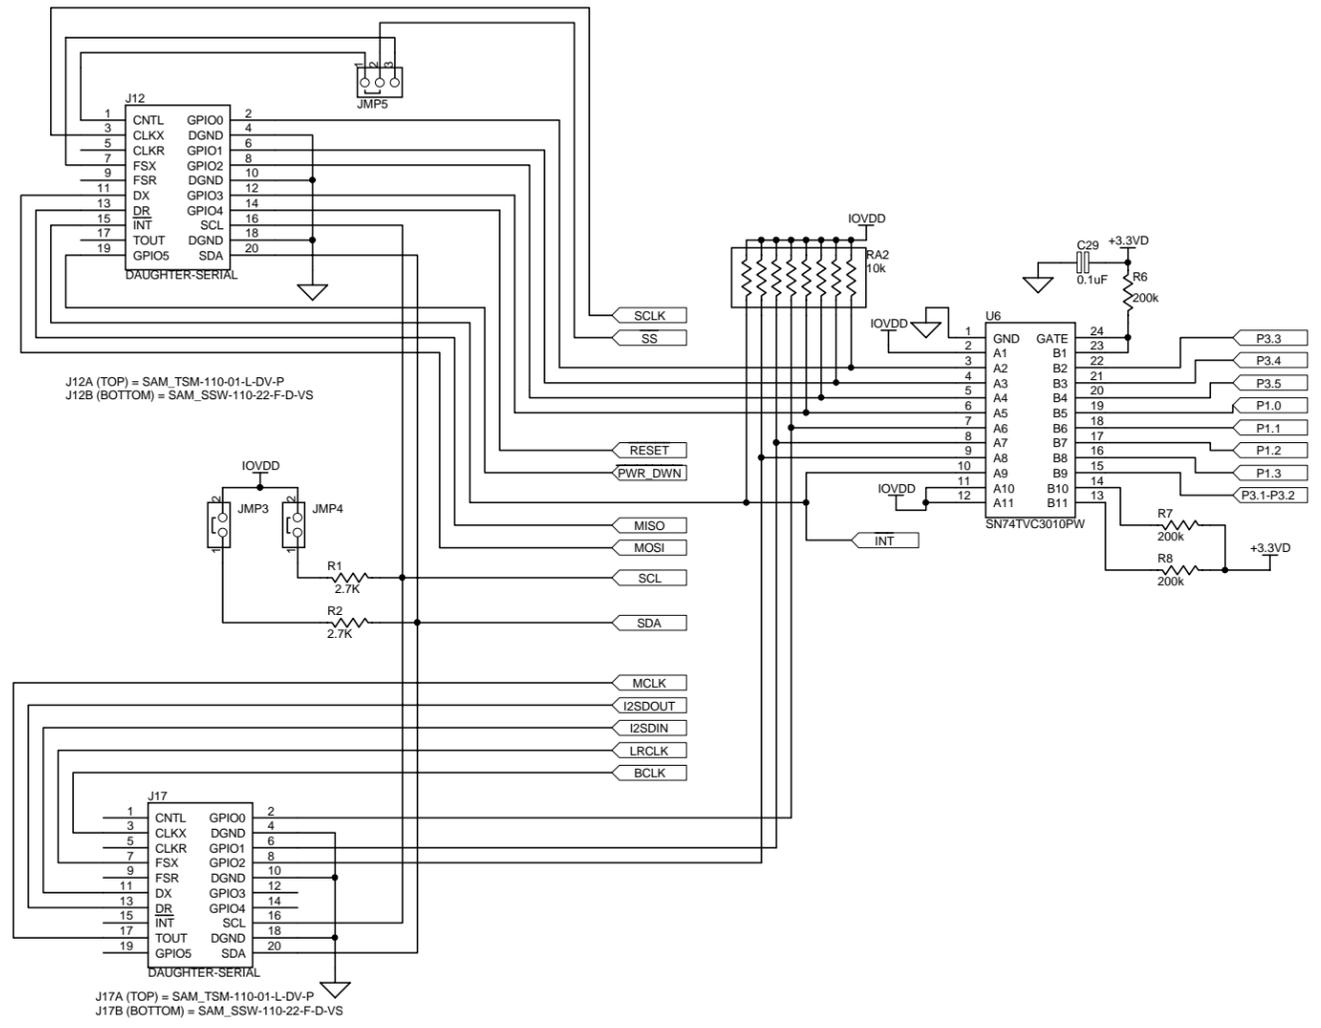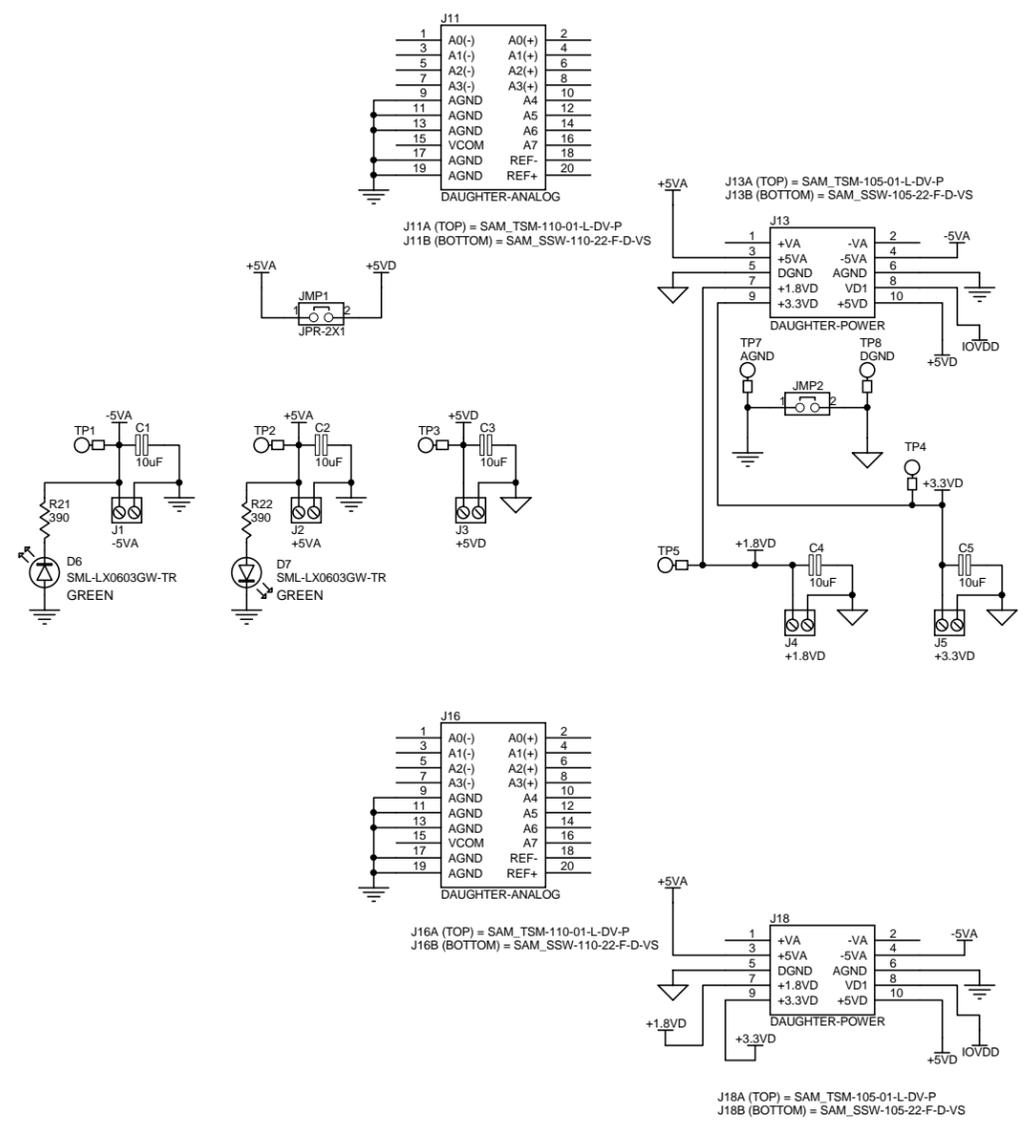

ENGINEER RICK DOWNS	TITLE	
DRAWN BY ROBERT BENJAMIN	USB-MODEVM INTERFACE	
DOCUMENT CONTROL NO. 6463996	SIZE B	DATE 3-Apr-2007
SHEET 2 OF 2	FILE C:\01_Tfdesigns\USB_MODEVM\usb-modevm_revDU5B Motherboard - ModEvm.ddb - Documents\SCH\Daughtercard Interface	REV D

Evaluation Board/Kit Important Notice

Texas Instruments (TI) provides the enclosed product(s) under the following conditions:

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. Persons handling the product(s) must have electronics training and observe good engineering practice standards. As such, the goods being provided are not intended to be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including product safety and environmental measures typically found in end products that incorporate such semiconductor components or circuit boards. This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and therefore may not meet the technical requirements of these directives or other related directives.

Should this evaluation board/kit not meet the specifications indicated in the User's Guide, the board/kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies TI from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge.

EXCEPT TO THE EXTENT OF THE INDEMNITY SET FORTH ABOVE, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

TI currently deals with a variety of customers for products, and therefore our arrangement with the user **is not exclusive.**

TI assumes **no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein.**

Please read the User's Guide and, specifically, the Warnings and Restrictions notice in the User's Guide prior to handling the product. This notice contains important safety information about temperatures and voltages. For additional information on TI's environmental and/or safety programs, please contact the TI application engineer or visit www.ti.com/esh.

No license is granted under any patent right or other intellectual property right of TI covering or relating to any machine, process, or combination in which such TI products or services might be or are used.

FCC Warning

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. It generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment in other environments may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

EVM Warnings and Restrictions

It is important to operate this EVM within the input voltage range of 3.3 V to 5 V and the output voltage range of 0 V to 5 V .

Exceeding the specified input range may cause unexpected operation and/or irreversible damage to the EVM. If there are questions concerning the input range, please contact a TI field representative prior to connecting the input power.

Applying loads outside of the specified output range may result in unintended operation and/or possible permanent damage to the EVM. Please consult the EVM User's Guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative.

During normal operation, some circuit components may have case temperatures greater than 30°C. The EVM is designed to operate properly with certain components above 85°C as long as the input and output ranges are maintained. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors. These types of devices can be identified using the EVM schematic located in the EVM User's Guide. When placing measurement probes near these devices during operation, please be aware that these devices may be very warm to the touch.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video
Wireless	www.ti.com/wireless-apps

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated