


Automotive Synchronous Boost – 5.0V @ 350mA

- Input 3.2..3.4V DC
- Output 5.0V @ 350mA
- Converter TPS61029
- Free-Running switching frequency of 600 kHz
- Working in continuous conduction mode
- Modified TPS61020EVM

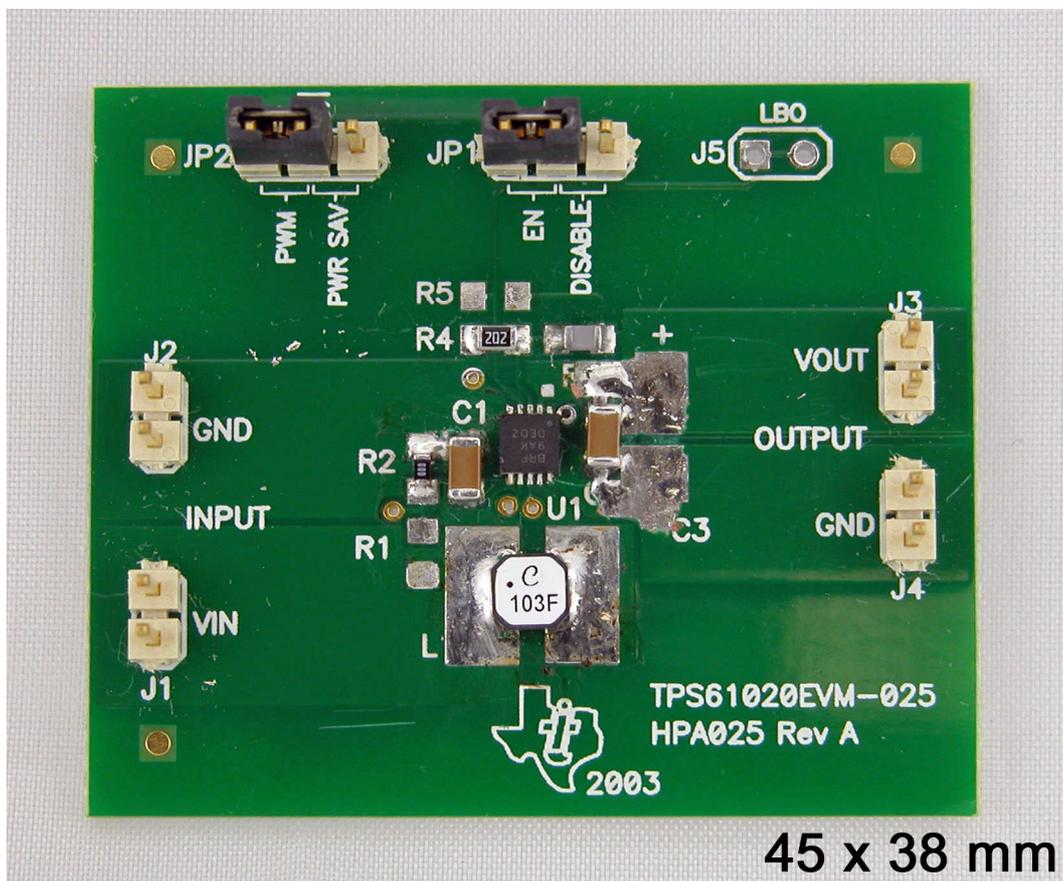

1 Startup

The startup waveform is shown in Figure 1. The input voltage is set at 3.3V, with no load on the 5.0V output.

Channel C1: **3.3V Input voltage**
1V/div, 500us/div

Channel C2: **5.0V Output voltage**
1V/div, 500us/div

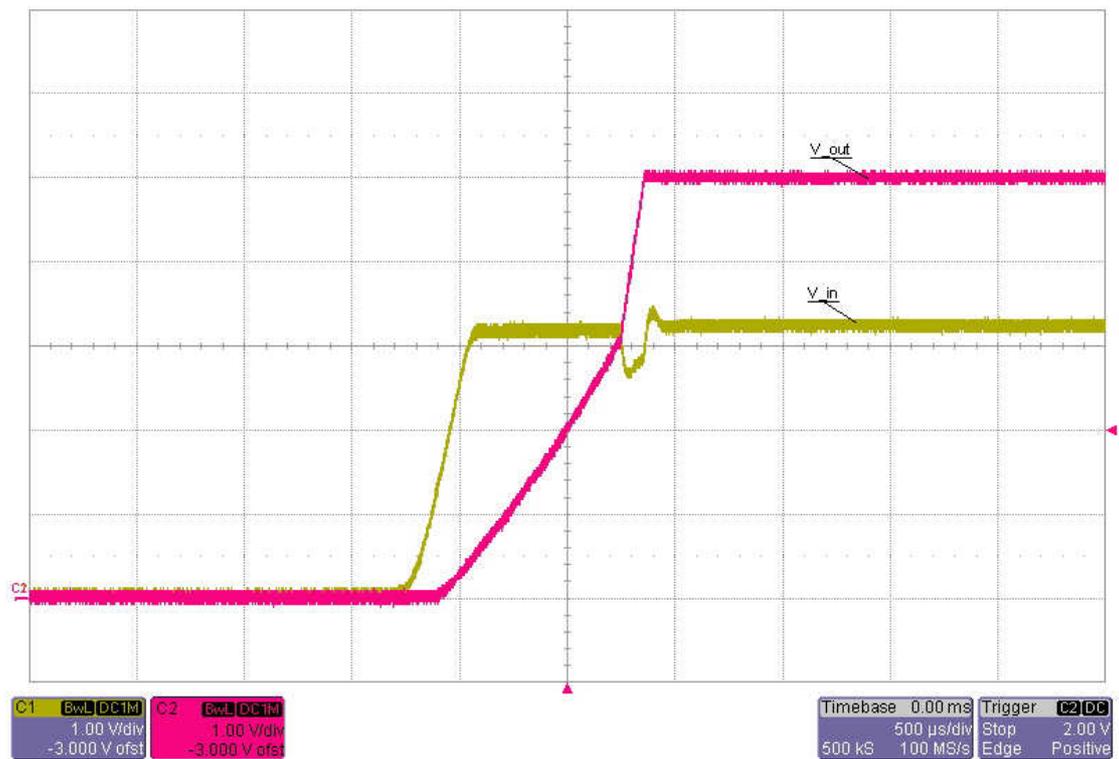


Figure 1

2 Shutdown

The shutdown waveform is shown in Figure 2. The input voltage is set at 3.3V with a 350mA load on the 5.0V output.

Channel C1: **3.3V Input voltage**
1V/div, 500us/div

Channel C2: **5.0V Output voltage**
1V/div, 500us/div

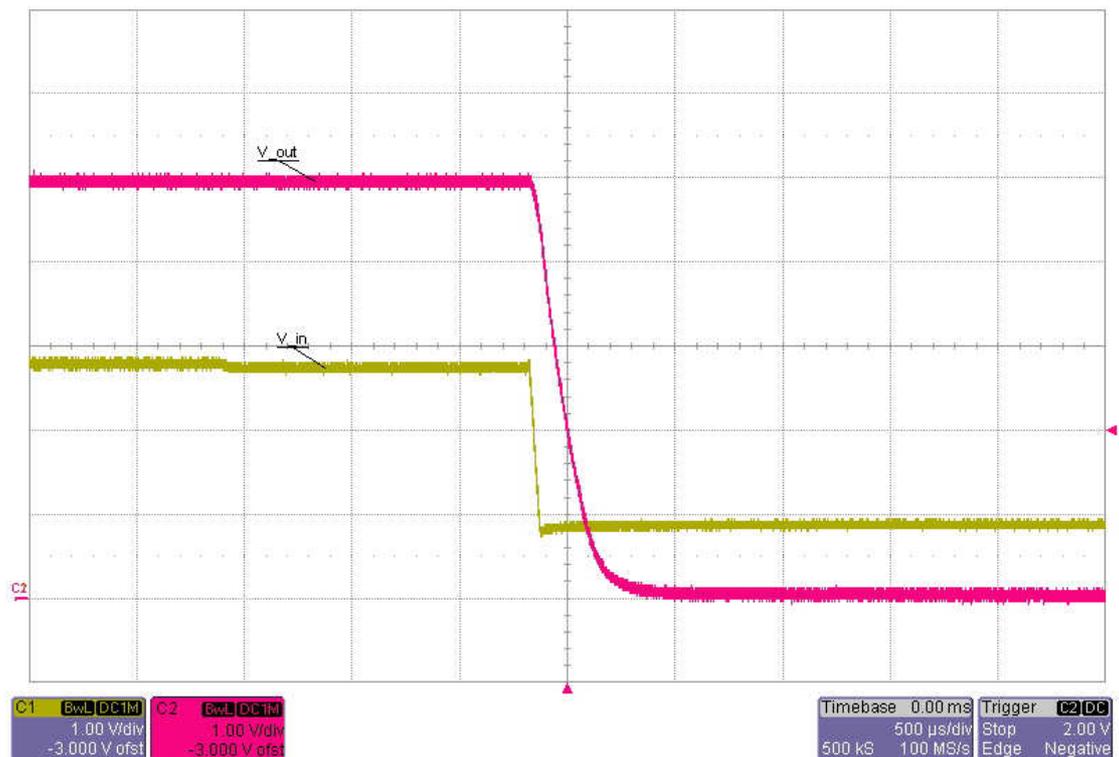


Figure 2

3 Efficiency & Load Regulation

The efficiency and load regulation are shown in Figure 3 and Figure 4.

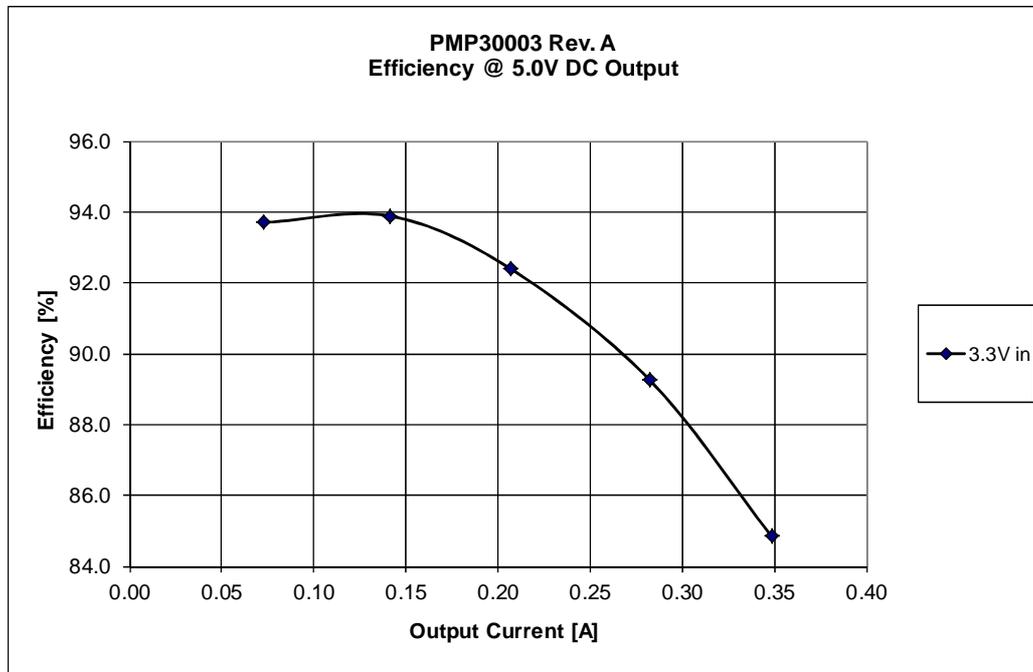


Figure 3

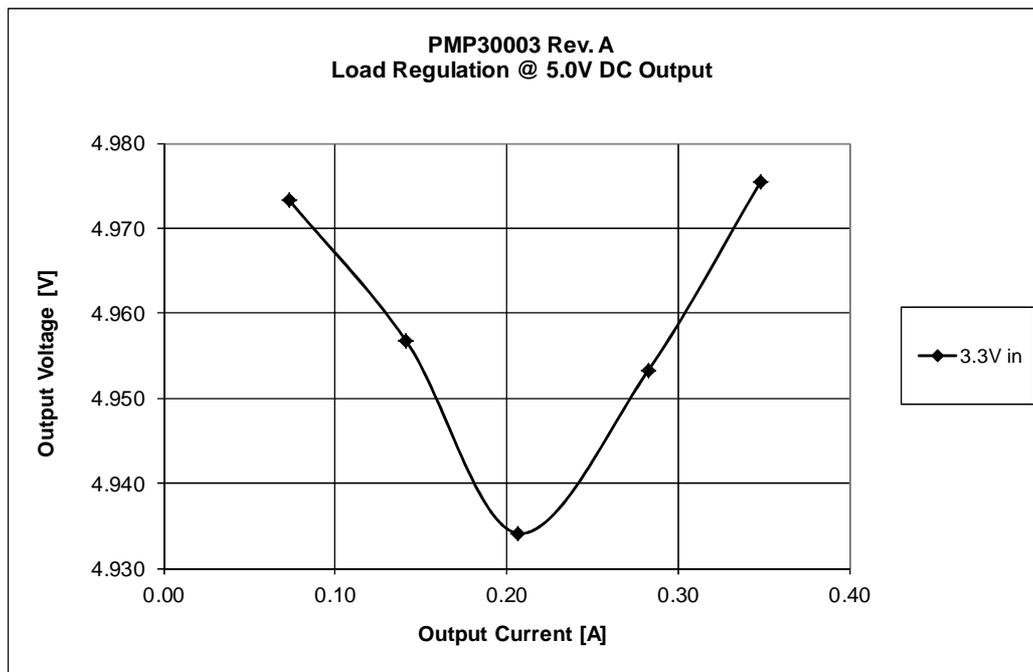


Figure 4

4 Load Step

The response to a load step and a load dump for the 5.0V output at an input voltage of 3.3V is shown in Figure 5.

Channel C2: **Output voltage**, -29mV undershoot (0.6%), 24mV overshoot (0.5%)
 20mV/div, 2ms/div, AC coupled

Channel C1: **Load current**, load step 100mA to 150mA and vice versa
 50mA/div, 2ms/div

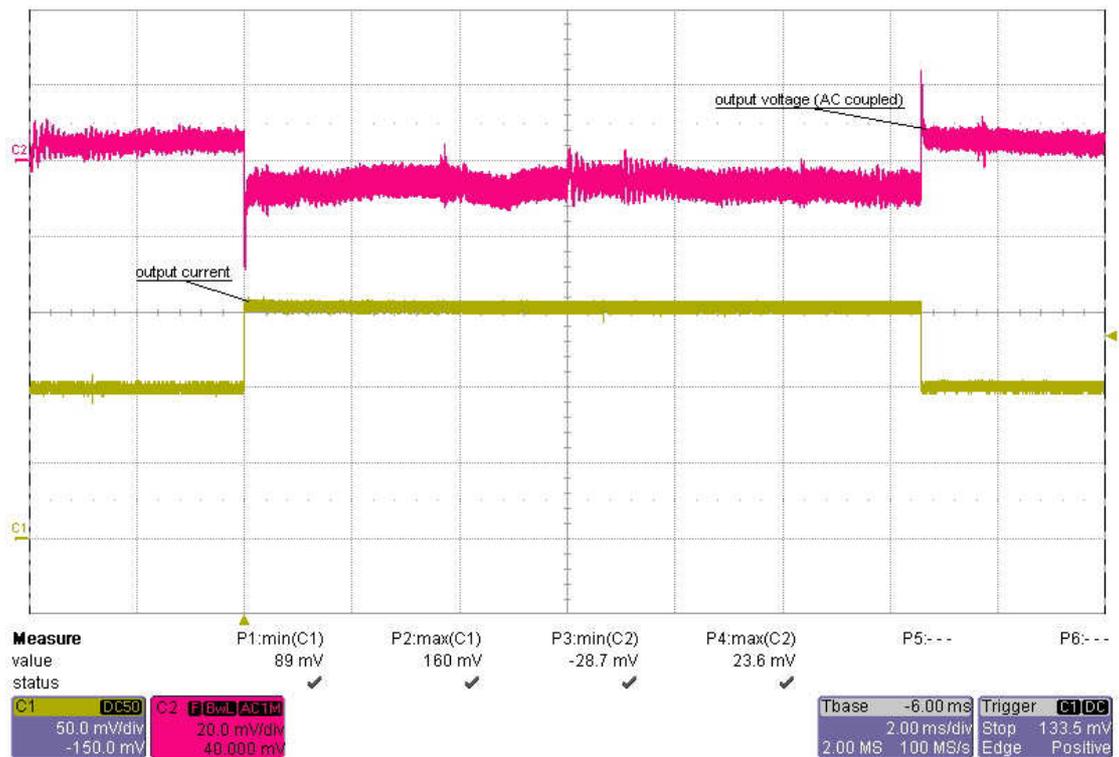


Figure 5

5 Frequency Response

Figure 6 shows the loop response at 3.3V input voltage and 350mA load.

3.3V input

- 1.6A load 60 deg phase margin, 9.7 kHz bandwidth, -10 dB gain margin

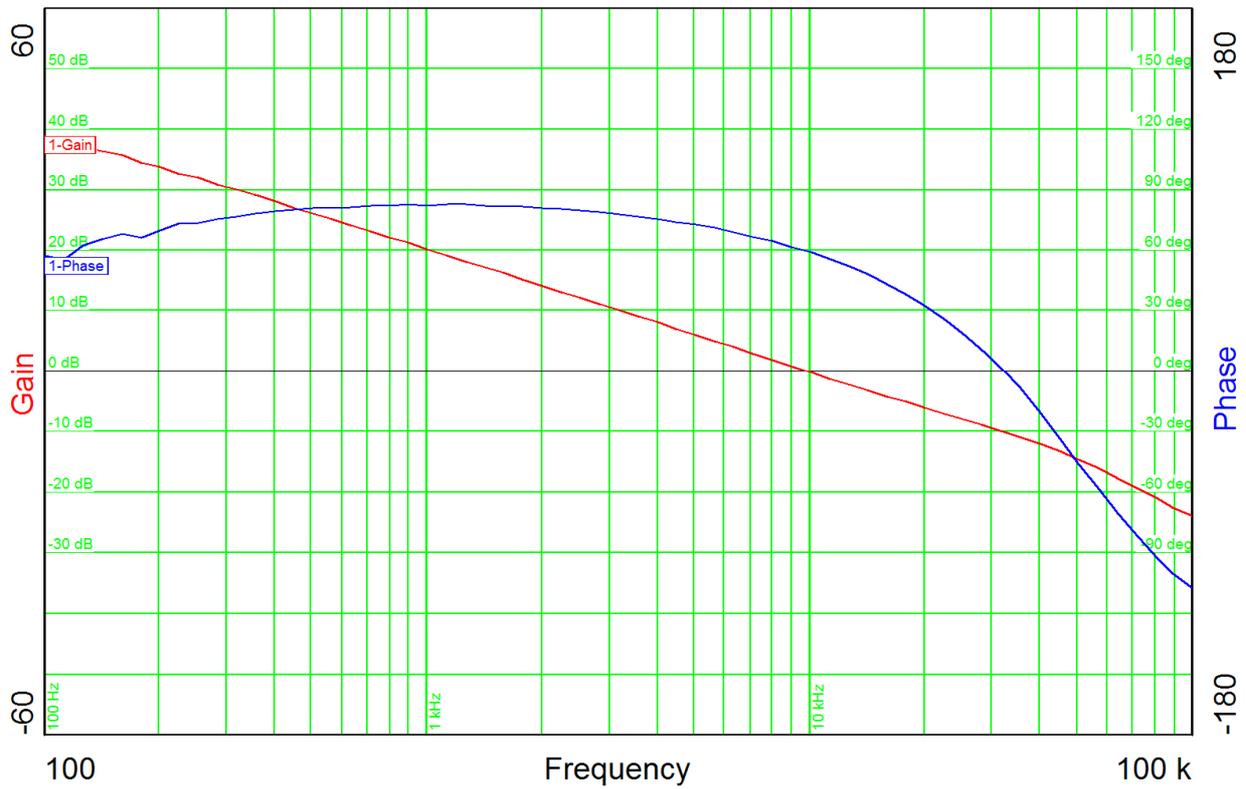


Figure 6

6 Switching Node

The drain-source voltage on the switching node is shown in Figure 7. The image was captured with 3.3V input and 350mA load.

Channel C2: **Drain-source voltage**, -0.1V minimum voltage, 8.0V maximum voltage
2V/div, 500ns/div

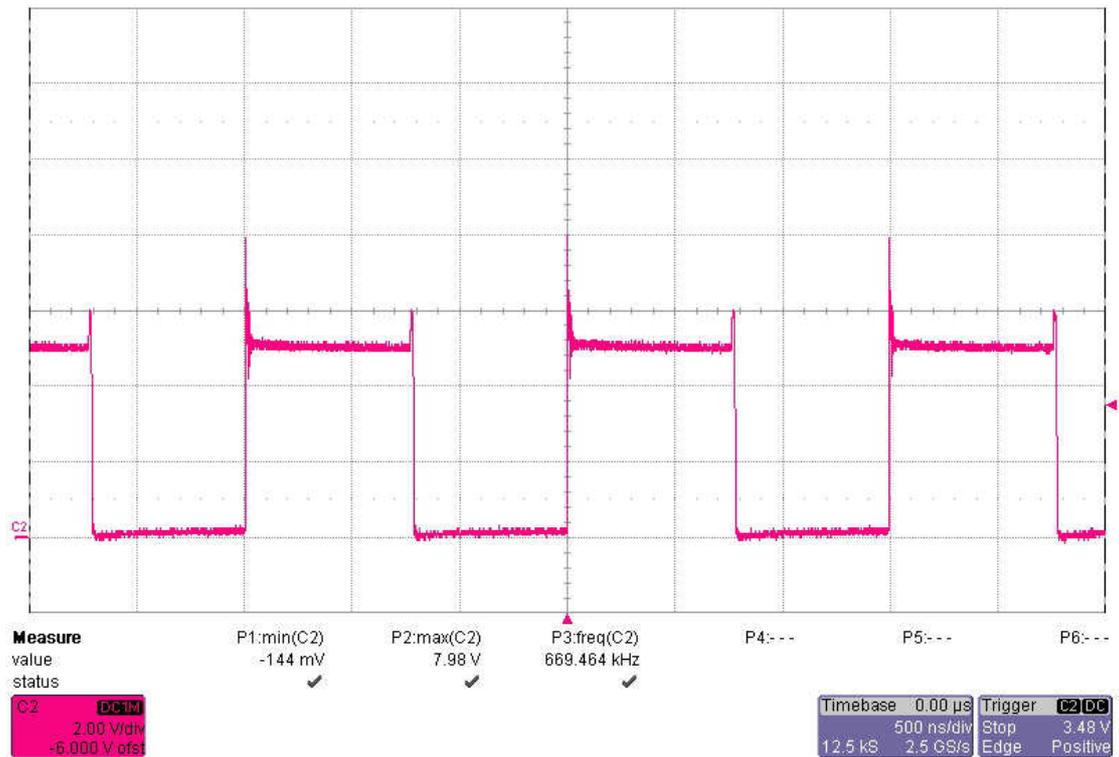


Figure 7

7 Output Ripple Voltage

The output ripple voltage at 350mA load and 3.3V input voltage is shown in Figure 8.

Channel C1: **Load current**
100mA/div, 1us/div

Channel C2: **Output voltage @ 3.3V input, 30mV peak-peak (ripple)**
50mV/div, 1us/div, AC coupled

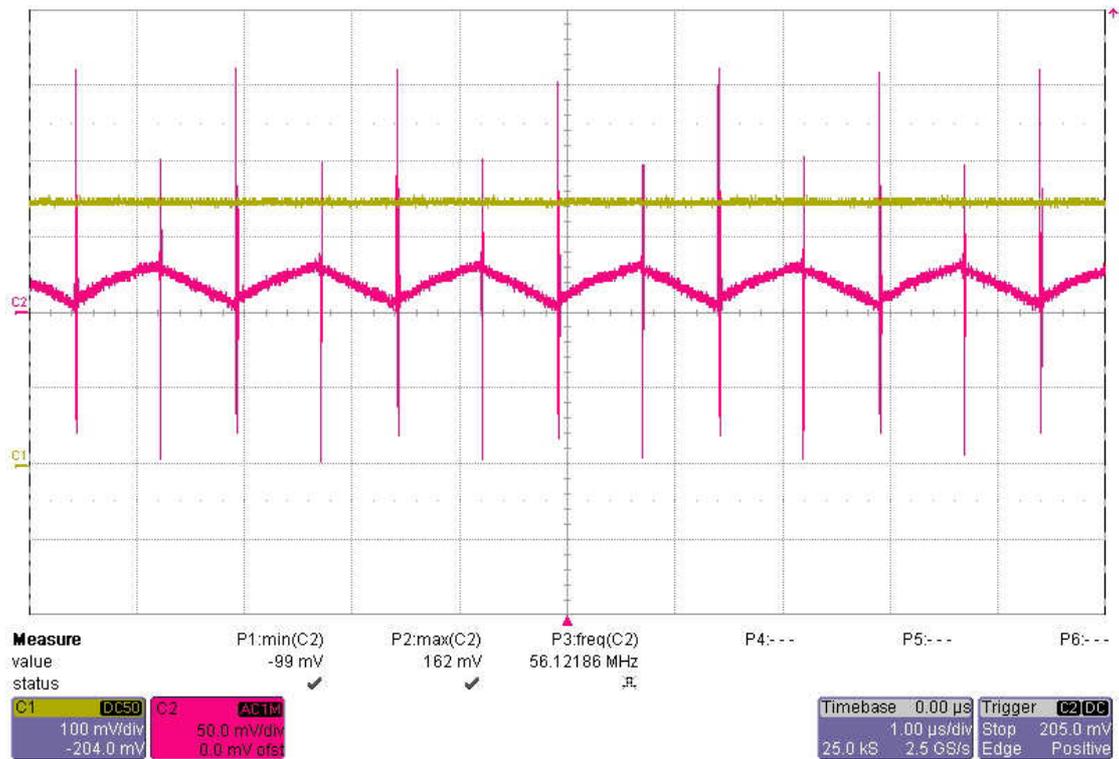


Figure 8

8 Thermal measurement

The thermal image (Figure 9) shows the circuit at an ambient temperature of 21 °C with an input voltage of 3.3V and a load of 350mA.

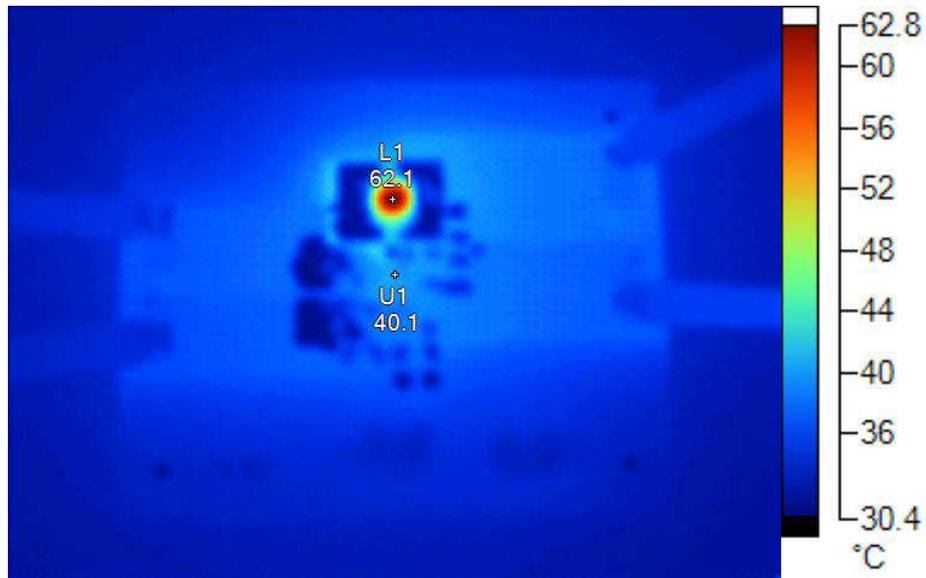


Figure 9

Markers

Label	Temperature	Emissivity	Background
L1	62.1 °C	0.95	21.0 °C
U1	40.1 °C	0.95	21.0 °C

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2021, Texas Instruments Incorporated