







CD54HC4020, CD74HC4020, CD54HCT4020, CD74HCT4020 SCHS201D - FEBRUARY 1998 - REVISED AUGUST 2022

CDx4HC4020, CDx4HCT4020 CDHigh-Speed CMOS Logic 14-Stage Binary Counter

1 Features

- Fully static operation
- **Buffered** inputs
- Common reset
- Negative edge clocking
- Fanout (over temperature range)
- Standard outputs: 10 LSTTL loads
 - Bus driver outputs: 15 LSTTL loads
- Wide operating temperature range: -55°C to 125°C
- Balanced propagation delay and transition times
- Significant power reduction compared to LSTTL Logic ICs
- HC types
 - 2 V to 6 V operation
 - High noise immunity: N_{IL} = 30%, N_{IH} = 30% of V_{CC} at $V_{CC} = 5 \text{ V}$
- HCT types
 - 4.5 V to 5.5 V operation
 - Direct LSTTL input logic compatibility, V_{IL} = 0.8 $V (max), V_{IH} = 2 V (min)$
 - CMOS input compatibility, I_I ≤ 1 μA at V_{OL},V_{OH}


2 Description

The 'HC4020 and 'HCT4020 are 14-stage ripple-carry binary counters. All counter stages are controller/ peripheral flip- flops. The state of the stage advances one count on the negative clock transition of each input pulse; a high voltage level on the MR line resets all counters to their zero state. All inputs and outputs are buffered.

Device Information

PART NUMBER	PACKAGE ⁽¹⁾	BODY SIZE (NOM)		
CD54HC4020	J (CDIP, 16)	24.38 mm × 6.92 mm		
CD74HC4020CD74	D (SOIC, 16)	9.90 mm × 3.90 mm		
HC4020	N (PDIP, 16)	19.31 mm × 6.35 mm		
CD54HCT4020	J (CDIP, 16)	24.38 mm × 6.92 mm		
CD74HCT4020CD7	D (SOIC, 16)	9.90 mm × 3.90 mm		
4HCT4020	N (PDIP, 16)	19.31 mm × 6.35 mm		

For all available packages, see the orderable addendum at the end of the datasheet.



Functional Block Diagram



Table of Contents

1 Features1	7.2 Functional Block Diagram
2 Description1	7.3 Device Functional Modes10
3 Revision History2	8 Power Supply Recommendations1
4 Pin Configuration and Functions3	9 Layout11
5 Specifications4	9.1 Layout Guidelines11
5.1 Absolute Maximum Ratings4	10 Device and Documentation Support12
5.2 Recommended Operating Conditions4	10.1 Receiving Notification of Documentation Updates12
5.3 Thermal Information4	10.2 Support Resources12
5.4 Electrical Characteristics5	10.3 Trademarks
5.5 Prerequisite for Switching Characteristics6	10.4 Electrostatic Discharge Caution12
5.6 Switching Characteristics6	10.5 Glossary12
6 Parameter Measurement Information8	11 Mechanical, Packaging, and Orderable
7 Detailed Description9	Information12
7.1 Overview9	

3 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


Changes from Revision C (October 2003) to Revision D (August 2022)

Page

 Updated the numbering, formatting, tables, figures, and cross-references throughout the document to reflect modern data sheet standards......



4 Pin Configuration and Functions



J, N, or D package 16-PIN CDIP, PDIP, or SOIC Top View



5 Specifications

5.1 Absolute Maximum Ratings

			MIN	MAX	UNIT
V _{CC}	Supply voltage		-0.5	7	V
I _{IK}	Input diode current	For $V_1 < -0.5 \text{ V}$ or $V_1 > V_{CC} + 0.5 \text{ V}$		±20	mA
I _{OK}	Output diode current	For $V_O < -0.5 \text{ V}$ or $V_O > V_{CC} + 0.5 \text{ V}$		±20	mA
Io	Output source or sink current per output pin	For $V_O > -0.5 \text{ V}$ or $V_O < V_{CC} + 0.5 \text{ V}$		±25	mA
	Continuous current through V _{CC} or GND			±50	mA
TJ	Junction temperature			150	°C
T _{stg}	Storage temperature range		– 65	150	°C
	Lead temperature (Soldering 10s) (SOIC - lead	tips only)		300	°C

5.2 Recommended Operating Conditions

			MIN	MAX	UNIT	
V	Supply voltage range	HC types	2	6	V	
V _{CC}	Supply voltage range	HCT types	4.5	5.5	V	
V _I , V _O	DC input or output voltage		0	V _{CC}	V	
		2 V		1000		
	Input rise and fall time	4.5 V		500	ns	
		6 V		400		
T _A	Temperature range		-55	125	°C	

5.3 Thermal Information

		D (SOIC)	N (PDIP)	
THERMAL METR	C	16 PINS	16 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance ⁽¹⁾	73	67	°C/W

⁽¹⁾ For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.



5.4 Electrical Characteristics

	PARAMETER	TEST	V (\(\)		25℃		-40℃ to	85℃	-55℃ to 125℃		UNIT
	PARAMETER	CONDITIONS(2)	V _{CC} (V)	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNII
HC TYP	ES										
			2	1.5			1.5		1.5		
V_{IH}	High level input voltage		4.5	3.15			3.15		3.15		V
	vollago		6	4.2			4.2		4.2		
			2			0.5		0.5		0.5	
V_{IL}	Low level input voltage		4.5			1.35		1.35		1.35	V
			6			1.8	-	1.8		1.8	
	High level output	I _{OH} = – 20 μA	2	1.9			1.9		1.9		
	voltage	I _{OH} = – 20 μA	4.5	4.4			4.4		4.4		V
V _{OH}	CMOS loads	I _{OH} = – 20 μA	6	5.9			5.9		5.9		
VОН	High level output	I _{OH} – 4 mA	4.5	3.98			3.84		3.7		V
TTL loads	voltage TTL loads	I _{OH} – 5.2 mA	6	5.48			5.34		5.2		V
	Low level output	I _{OL} = 20 μA	2			0.1		0.1		0.1	
	voltage	I _{OL} = 20 μA	4.5			0.1		0.1		0.1	V
V _{OL}	CMOS loads	I _{OL} = 20 μA	6			0.1		0.1		0.1	
V OL	Low level output	I _{OL} = 4 mA	4.5			0.26	-	0.33		0.4	
	voltage TTL loads	I _{OL} = 5.2 mA	6			0.26		0.33		0.4	V
l _l	Input leakage current	V _{CC} or GND	6			±0.1		±1		±1	μA
<u>'</u> Ісс	Supply current	V _{CC} or GND	6			8		80		160	<u>'</u> μΑ
HCT TY											
V _{IH}	High level input voltage		4.5 to 5.5	2			2		2		V
V _{IL}	Low level input voltage		4.5 to 5.5			0.8		0.8		0.8	V
.,	High level output voltage CMOS loads	I _{OH} = – 20 μA	4.5	4.4			4.4		4.4		V
V _{OH}	High level output voltage TTL loads	I _{OH} = – 4 mA	4.5	3.98			3.84		3.7		V
M	Low level output voltage CMOS loads	I _{OL} = 20 μA	4.5			0.1		0.1		0.1	V
V _{OL}	Low level output voltage TTL loads	I _{OL} = 4 mA	4.5			0.26		0.33		0.4	V
I	Input leakage current	V _{CC} and GND	5.5			±0.1		±1		±1	μΑ
Icc	Supply current	V _{CC} or GND	5.5			8		80		160	μΑ
A.L. (1)	Additional supply	MR input held at V _{CC} -2.1	4.5 to 5.5		100	234		292.5		318.5	μA
ΔI _{CC} ⁽¹⁾	current per input pin	CP input held at	4.5 to		100	180		225		245	μA

⁽¹⁾ For dual-supply systems theoretical worst case (V_1 = 2.4 V, V_{CC} = 5.5 V) specification is 1.8 mA.

⁽²⁾ $V_I = V_{IH}$ or V_{IL} , unless otherwise noted.



5.5 Prerequisite for Switching Characteristics

	DADAMETED			25℃		-40℃ to	85℃	-55℃ to 125℃		
	PARAMETER	V _{CC} (V)	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
HC TY	PES						•			
		2	6			5		4		
f_{MAX}	Maximum input pulse frequency	4.5	30			25		20		MHz
	nequency	6	35			29		24		
		2	80			100		120		
t _W	Input pulse width	4.5	16			20		24		ns
	6	14			17		20			
		2	50	,		65		75		
t _{REM} Reset removal time	4.5	10			13		15		ns	
		6	9			11		13		
		2	80			100		120		
t _W	Reset pulse width	4.5	16			20		24		ns
		6	14	,		17		20		
HCT T	YPES			,						
f _{MAX}	Maximum input pulse frequency	4.5	25			20		16		MHz
t _W	Input pulse width	4.5	20			25		30		ns
t _{REC}	Reset recovery time	4.5	10			13		15		ns
t _W	Reset pulse width	4.5	20			25		30		ns

5.6 Switching Characteristics

Input t_r , t_f = 6 ns. See Parameter Measurement Information

PARAMETER		TEST	V 00	25℃		-40℃ to	85℃	-55℃ to 125℃		UNIT	
	PARAMETER	CONDITIONS	V _{CC} (V)	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNII
HC TY	PES										
		C _L = 50 pF	2			140		175		210	
t _{PLH} ,	Propagation delay time	OL = 30 pi	4.5			28		35		42	20
t_{PHL}	CP to Q1' Output	C _L = 15 pF	5		11						ns
		C _L = 50 pF	6			24		30		36	
		C = 50 pE	2			75		95		110	
t _{PLH} ,	On to O 1 1	$C_L = 50 pF$	4.5			15		19		22	20
t _{PHL}	$\overline{\mathbb{Q}}$ n to \mathbb{Q}_n + 1	C _L = 15 pF	5		6						ns
		C _L = 50 pF	6			13		16		19	
		0 50 5	2			170		215		255	ns
t _{PLH} ,	MR to Q _n		4.5			34		43		51	
t_{PHL}	INIX to Q _n	C _L = 50 pF	5		14						
			6			29		37		43	
			2			75		95		110	
t _{TLH} , t _{THL}	Output transition time	C _L = 50 pF	4.5			15		19		22	ns
IIIL			6			13		16		19	
C _{IN}	Input capacitance	C _L = 50 pF				10		10		10	pF
C _{PD}	Power dissipation capacitance ⁽¹⁾ (2)	C _L = 15 pF	5		30						pF
нст т	YPES	ı					,			1	



5.6 Switching Characteristics (continued)

Input t_r, t_f = 6 ns. See Parameter Measurement Information

	PARAMETER	TEST	V (A)		25℃		-40℃ to	85℃	-55℃ to	125℃	UNIT
	FARAIVIETER	CONDITIONS	V _{CC} (V)	MIN	TYP	MAX	MIN	MAX	MIN	MAX	ONII
t _{PLH} ,	Propagation delay time	C _L = 50 pF	4.5			40		50		60	ns
t _{PHL}		C _L = 15 pF	5	,	17						115
t _{PLH} , t _{PHL} Qn to Q _n + 1	C _L = 50 pF	4.5			15		19		22	ns	
	C _L = 15 pF	5		6						115	
t _{PLH} ,	MR to Q _n	C _L = 50 pF	4.5			40		50		60	ns
t _{PHL}	WIN to Q _n	C _L = 15 pF	5	,	17						115
t _{TLH} , t _{THL}	Output transition	C _L = 50 pF	4.5			15		19		22	ns
C _{IN}	Input capacitance	C _L = 50 pF				10		10		10	pF
C _{PD}	Power dissipation capacitance ⁽¹⁾ (2)	C _L = 15 pF	5		30						pF

⁽¹⁾ C_{PD} is used to determine the dynamic power consumption, per package.


⁽²⁾ $P_D = V_{CC}^2 f_i(C_{PD} + C_L)$ where f_i = Input frequency, C_L = Output load capacitance, V_{CC} = Supply Voltage.

6 Parameter Measurement Information

Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics: PRR \leq 1 MHz, Z_O = 50 Ω , t_t < 6 ns.

For clock inputs, f_{max} is measured when the input duty cycle is 50%.

The outputs are measured one at a time with one input transition per measurement.



(1) C_L includes probe and test-fixture capacitance.

Figure 6-1. Load Circuit for Push-Pull Outputs






Figure 6-2. Voltage Waveforms, Propagation **Delays for Standard CMOS Inputs**



(1) The greater between t_r and t_f is the same as t_t.

Figure 6-3. Voltage Waveforms, Input and Output **Transition Times for Standard CMOS Inputs**



(1) The greater between t_{PLH} and t_{PHL} is the same as t_{pd} .

Figure 6-4. Voltage Waveforms, Propagation Delays for TTL-Compatible Inputs



7 Detailed Description

7.1 Overview

The 'HC4020 and 'HCT4020 are 14-stage ripple-carry binary counters. All counter stages are controller flipflops. The state of the stage advances one count on the negative clock transition of each input pulse; a high voltage level on the CLR line resets all counters to their zero state. All inputs and outputs are buffered.

7.2 Functional Block Diagram

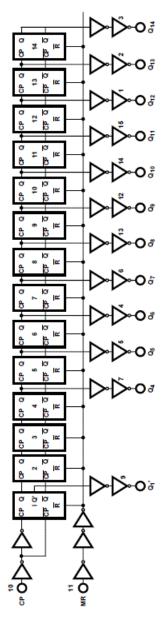


Figure 7-1. Functional Diagram



7.3 Device Functional Modes

Table 7-1. Truth Table

CP COUNT ⁽¹⁾	MR	OUTPUT STATE
↑	L	No change
↓	L	Advance to next state
X	Н	All outputs are low

(1) H = High Voltage Level, L = Low Voltage Level, X = Don't Care ↑ = Transition from Low to High Level, ↓ = Transition from High to Low.



8 Power Supply Recommendations

The power supply can be any voltage between the minimum and maximum supply voltage rating located in the *Recommended Operating Conditions*. Each V_{CC} terminal should have a good bypass capacitor to prevent power disturbance. A 0.1-µF capacitor is recommended for this device. It is acceptable to parallel multiple bypass caps to reject different frequencies of noise. The 0.1-µF and 1-µF capacitors are commonly used in parallel. The bypass capacitor should be installed as close to the power terminal as possible for best results.

9 Layout

9.1 Layout Guidelines

When using multiple-input and multiple-channel logic devices inputs must not ever be left floating. In many cases, functions or parts of functions of digital logic devices are unused; for example, when only two inputs of a triple-input AND gate are used or only 3 of the 4 buffer gates are used. Such unused input pins must not be left unconnected because the undefined voltages at the outside connections result in undefined operational states. All unused inputs of digital logic devices must be connected to a logic high or logic low voltage, as defined by the input voltage specifications, to prevent them from floating. The logic level that must be applied to any particular unused input depends on the function of the device. Generally, the inputs are tied to GND or V_{CC} , whichever makes more sense for the logic function or is more convenient.



10 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

10.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

10.2 Support Resources

TI E2E[™] support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

10.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

10.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

10.5 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com 16-Apr-2024

PACKAGING INFORMATION

Orderable Device	Status	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
5962-8945801EA	ACTIVE	CDIP	J	16	25	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-8945801EA CD54HCT4020F3A	Samples
CD54HC4020F	ACTIVE	CDIP	J	16	25	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	CD54HC4020F	Samples
CD54HC4020F3A	ACTIVE	CDIP	J	16	25	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	8500301EA CD54HC4020F3A	Samples
CD54HCT4020F3A	ACTIVE	CDIP	J	16	25	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-8945801EA CD54HCT4020F3A	Samples
CD74HC4020E	ACTIVE	PDIP	N	16	25	RoHS & Green	NIPDAU	N / A for Pkg Type	-55 to 125	CD74HC4020E	Samples
CD74HC4020EE4	ACTIVE	PDIP	N	16	25	RoHS & Green	NIPDAU	N / A for Pkg Type	-55 to 125	CD74HC4020E	Samples
CD74HC4020M96	ACTIVE	SOIC	D	16	2500	RoHS & Green	NIPDAU SN	Level-1-260C-UNLIM	-55 to 125	HC4020M	Samples
CD74HCT4020E	ACTIVE	PDIP	N	16	25	RoHS & Green	NIPDAU	N / A for Pkg Type	-55 to 125	CD74HCT4020E	Samples
CD74HCT4020M96	ACTIVE	SOIC	D	16	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-55 to 125	HCT4020M	Samples

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

⁽²⁾ RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

⁽³⁾ MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

⁽⁴⁾ There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

PACKAGE OPTION ADDENDUM

www.ti.com 16-Apr-2024

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF CD54HC4020, CD54HCT4020, CD74HC4020, CD74HCT4020:

Catalog: CD74HC4020, CD74HCT4020

• Military: CD54HC4020, CD54HCT4020

NOTE: Qualified Version Definitions:

Catalog - TI's standard catalog product

Military - QML certified for Military and Defense Applications

PACKAGE MATERIALS INFORMATION

www.ti.com 16-Apr-2024

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
CD74HC4020M96	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1
CD74HCT4020M96	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1

www.ti.com 16-Apr-2024

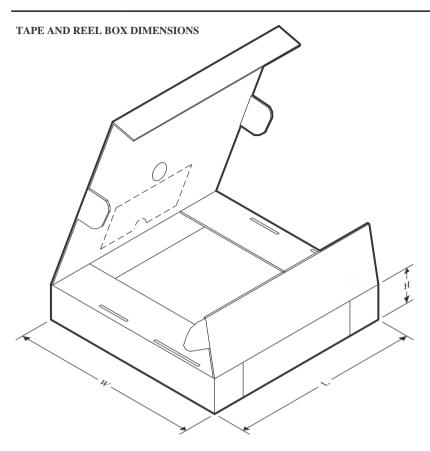

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)	
CD74HC4020M96	SOIC	D	16	2500	356.0	356.0	35.0	
CD74HCT4020M96	SOIC	D	16	2500	340.5	336.1	32.0	

PACKAGE MATERIALS INFORMATION

www.ti.com 16-Apr-2024

TUBE



*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
CD74HC4020E	N	PDIP	16	25	506	13.97	11230	4.32
CD74HC4020E	N	PDIP	16	25	506	13.97	11230	4.32
CD74HC4020EE4	N	PDIP	16	25	506	13.97	11230	4.32
CD74HC4020EE4	N	PDIP	16	25	506	13.97	11230	4.32
CD74HCT4020E	N	PDIP	16	25	506	13.97	11230	4.32
CD74HCT4020E	N	PDIP	16	25	506	13.97	11230	4.32

14 LEADS SHOWN



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

N (R-PDIP-T**)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.



D (R-PDS0-G16)

PLASTIC SMALL OUTLINE



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AC.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2024, Texas Instruments Incorporated