23

24

2Q8 []

2OE

26 2D8

25 25 2LE

SCAS121B - MARCH 1990 - REVISED APRIL 1996

<ul> <li>Members of the Texas Instruments Widebus™ Family</li> <li>3-State True Outputs</li> </ul>	54AC16373 WD PACKAGE 74AC16373 DL PACKAGE (TOP VIEW)	
<ul> <li>Full Parallel Access for Loading</li> </ul>		
-		
<ul> <li>Flow-Through Architecture Optimizes</li> </ul>	1Q1 2 47 1D1	
PCB Layout	1Q2 3 46 1D2	
<ul> <li>Distributed V<sub>CC</sub> and GND Pin Configuration</li> </ul>	GND 4 45 GND	
Minimizes High-Speed Switching Noise	1Q3 5 44 1D3	
<ul> <li>EPIC<sup>™</sup> (Enhanced-Performance Implanted</li> </ul>		
CMOS) 1-μm Process	V <sub>CC</sub> 7 42 V <sub>CC</sub>	
500-mA Typical Latch-Up Immunity at	1Q5 8 41 1D5	
125°C	1Q6 9 40 1D6	
<ul> <li>Package Options Include Plastic 300-mil</li> </ul>		
Shrink Small-Outline (DL) Packages Using	1Q7 11 38 1D7	
25-mil Center-to-Center Pin Spacings and	1Q8 12 37 1D8	
380-mil Fine-Pitch Ceramic Flat (WD)	2Q1 13 36 2D1	
Packages Using 25-mil Center-to-Center	2Q2 [ 14 35 ] 2D2	
Pin Spacings	GND 15 34 GND	
·	2Q3 0 16 33 2D3	
description	2Q4 0 17 32 2D4	
•	V <sub>CC</sub>   18 31   V <sub>CC</sub>	
The 'AC16373 are 16-bit transparent D-type	2Q5 [] 19 30 [] 2D5	
latches with 3-state outputs designed specifically	2Q6 🛛 20 29 🛛 2D6	
for driving highly capacitive or relatively	GND 🛛 21 28 🛛 GND	
low-impedance loads. They are particularly	2Q7 🛛 22 27 🗋 2D7	

A buffered output-enable ( $\overline{OE}$ ) input can be used to place the eight outputs in either a normal logic state (high or low logic levels) or a high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly. The high-impedance state and the increased drive provide the capability to drive bus lines without need for interface or pullup components.  $\overline{OE}$  does not affect internal operations of the latch. Old data can be retained or new data can be entered while the outputs are in the high-impedance state.

The 74AC16373 is packaged in TI's shrink small-outline package (DL), which provides twice the I/O pin count and functionality of standard small-outline packages in the same printed-circuit-board area.

The 54AC16373 is characterized for operation over the full military temperature range of –55°C to 125°C. The 74AC16373 is characterized for operation from –40°C to 85°C.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

EPIC and Widebus are trademarks of Texas Instruments Incorporated.

suitable for implementing buffer registers, I/O

ports, bidirectional bus drivers, and working

registers. The device can be used as two 8-bit latches or one 16-bit latch. When the latch-enable (LE) input is high, the Q outputs follow the data (D) inputs. When LE is taken low, the Q outputs are latched at the levels set up at the D inputs.

UNLESS OTHERWISE NOTED this document contains PRODUCTION DATA information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



Copyright © 1996, Texas Instruments Incorporated

# 54AC16373, 74AC16373 16-BIT TRANSPARENT D-TYPE LATCHES WITH 3-STATE OUTPUTS SCAS121B – MARCH 1990 – REVISED APRIL 1996

	FUNCTION TABLE											
	INPUTS	OUTPUT										
OE	LE	D	Q									
L	Н	Н	Н									
L	н	L	L									
L	L	Х	Q <sub>0</sub>									
н	Х	Х	Z									

## logic symbol<sup>†</sup>


1 <mark>0E</mark>	1	1EN		
1LE	48	C1		
2 <mark>0E</mark>	24	2EN		
2LE	25	C2		
ZLL				
1D1	47	1D 1 ∇	2	1Q1
1D1	46		3	1Q2
1D2	44		5	1Q2
1D3	43		6	
	41		8	1Q4
1D5	40		9	1Q5
1D6	38		11	1Q6
1D7	37		12	1Q7
1D8	36		13	1Q8
2D1	35	2D 2 ▽	14	2Q1
2D2	33		16	2Q2
2D3	32		17	2Q3
2D4	30		19	2Q4
2D5	29		20	2Q5
2D6	27	ļ	22	2Q6
2D7	26	ļ	23	2Q7
2D8				2Q8


<sup>†</sup> This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.



SCAS121B - MARCH 1990 - REVISED APRIL 1996

### logic diagram (positive logic)





**To Seven Other Channels** 



#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

Supply voltage range, V <sub>CC</sub>	–0.5 V to 7 V
Input voltage range, V <sub>I</sub> (see Note 1)	–0.5 V to V <sub>CC</sub> + 0.5 V
Output voltage range, V <sub>O</sub> (see Note 1)	–0.5 V to V <sub>CC</sub> + 0.5 V
Input clamp current, $I_{IK}$ ( $V_I < 0$ or $V_I > V_{CC}$ )	±20 mA
Output clamp current, $I_{OK}$ (V <sub>O</sub> < 0 or V <sub>O</sub> > V <sub>CC</sub> )	±50 mA
Continuous output current, $I_{O}$ (V <sub>O</sub> = 0 to V <sub>CC</sub> )	±50 mA
Continuous current through V <sub>CC</sub> or GND	±400 mA
Maximum power dissipation at $T_A = 55^{\circ}C$ (in still air) (see Note 2): DL package	1.2 W
Storage temperature range, T <sub>stg</sub>	–65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

2. The maximum package power dissipation is calculated using a junction temperature of 150°C and a board trace length of 750 mils.



SCAS121B - MARCH 1990 - REVISED APRIL 1996

#### recommended operating conditions (see Note 3)

			54	AC1637	'3	74	AC1637	3	UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	UNIT
VCC	Supply voltage		3	5	5.5	3	5	5.5	V
		$V_{CC} = 3 V$	2.1			2.1			
VIH	High-level input voltage	$V_{CC} = 4.5 V$	3.15			3.15			V
		$V_{CC} = 5.5 V$	3.85			3.85			
		$V_{CC} = 3 V$			0.9			0.9	
VIL	Low-level input voltage	$V_{CC} = 4.5 V$		219	1.35			1.35	V
		V <sub>CC</sub> = 5.5 V		N.	1.65			1.65	
VI	Input voltage		0	4	VCC	0		VCC	V
VO	Output voltage		0	5	VCC	0		VCC	V
		VCC = 3 V	10	22	-4			-4	
IOH	High-level output current	$V_{CC} = 4.5 V$	Ro		-24			-24	mA
		$V_{CC} = 5.5 V$	~		-24			-24	
		V <sub>CC</sub> = 3 V			12			12	
IOL	Low-level output current	$V_{CC} = 4.5 V$			24			24	mA
		V <sub>CC</sub> = 5.5 V			24			24	
$\Delta t/\Delta v$	Input transition rise or fall rate		0		10	0		10	ns/V
Тд	Operating free-air temperature		-55		125	-40		85	°C

NOTE 3: Unused inputs must be held high or low to prevent them from floating.

#### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

DADAMETED	TEST CONDITIONS		Т	<b>₄ = 25°C</b>	;	54AC	6373	74AC1	6373	UNIT
PARAMETER	TEST CONDITIONS	VCC	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
		3 V	2.9			2.9		2.9		
	I <sub>OH</sub> = -50 μA	4.5 V	4.4			4.4		4.4		
		5.5 V	5.4			5.4		5.4		
Vон	$I_{OH} = -4 \text{ mA}$	3 V	2.58			2.48		2.48		V
	1	4.5 V	3.94			3.8	6	3.8		
	$I_{OL} = -24 \text{ mA}$	5.5 V	4.94			4.8	1F	4.8		
	$I_{OH} = -75 \text{ mA}^{\dagger}$	5.5 V				3.85	24	3.85		
		3 V			0.1	~	0.1		0.1	
	I <sub>OL</sub> = 50 μA	4.5 V			0.1	ζ,	0.1		0.1	
		5.5 V			0.1	20	0.1		0.1	
VOL	I <sub>OL</sub> = 12 mA	3 V			0.36	50	0.44		0.44	V
	1	4.5 V			0.36		0.44		0.44	
	I <sub>OL</sub> = 24 mA	5.5 V			0.36		0.44		0.44	
	I <sub>OL</sub> = 75 mA <sup>†</sup>	5.5 V					1.65		1.65	
lj	$V_I = V_{CC}$ or GND	5.5 V			±0.1		±1		±1	μA
I <sub>OZ</sub>	$V_{O} = V_{CC}$ or GND	5.5 V			±0.5		±5		±5	μA
ICC	$V_{I} = V_{CC} \text{ or GND}, \qquad I_{O} = 0$	5.5 V			8		80		80	μA
Ci	$V_{I} = V_{CC}$ or GND	5 V		4.5						pF
Co	$V_{O} = V_{CC}$ or GND	5 V		12						pF

<sup>†</sup>Not more than one output should be tested at a time, and the duration of the test should not exceed 10 ms.

PRODUCT PREVIEW information concerns products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.



## timing requirements over recommended operating free-air temperature range, $V_{CC}$ = 3.3 V $\pm$ 0.3 V (unless otherwise noted) (see Figure 1)

		T <sub>A</sub> = 25°C		54AC16373		74AC16373		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	UNIT
tw	Pulse duration, LE high	5		5	1. C	5		ns
t <sub>su</sub>	Setup time, data before LE $\downarrow$	1.5		1.5	110	1.5		ns
th	Hold time, data after LE $\downarrow$	3		3		3		ns

# timing requirements over recommended operating free-air temperature range, $V_{CC}$ = 5 V $\pm$ 0.5 V (unless otherwise noted) (see Figure 1)

		T <sub>A</sub> = 2	25°C	54AC16373		74AC16373		UNIT
		MIN	MAX	MIN	МАХ	MIN	MAX	UNIT
tw	Pulse duration, LE high	4		4	12.2	4		ns
t <sub>su</sub>	Setup time, data before LE $\downarrow$	1.5		1.5	Nr.	1.5		ns
t <sub>h</sub>	Hold time, data after LE $\downarrow$	2.5		2.5		2.5		ns

# switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 3.3 V $\pm$ 0.3 V (unless otherwise noted) (see Figure 1)

DADAMETED	PARAMETER FROM		T <sub>A</sub> = 25°C		54AC1	6373	74AC16373		UNIT	
FARAWETER	(INPUT)	(OUTPUT)	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
<sup>t</sup> PLH	D	Q	3.7	10.6	13.4	3.7	15.1	3.7	15.1	ns
<sup>t</sup> PHL	D	Q	4.3	11.3	14	4.3	14.8	4.3	14.8	115
<sup>t</sup> PLH	LE	Q	4.6	12.9	15.8	4.6	18.6	4.6	18.6	ns
<sup>t</sup> PHL	LC	Q	4.5	12.1	14.6	4.5	16.4	4.5	16.4	115
<sup>t</sup> PZH	OE	Q	4.2	11.8	14.8	4.2	17.5	4.2	17.5	ns
<sup>t</sup> PZL	ÛE	Q	5.4	16.3	19.8	5.4	22.3	5.4	22.3	115
<sup>t</sup> PHZ		Q	4.2	7.9	9.5	4.2	10.2	4.2	10.2	
<sup>t</sup> PLZ	ŌĒ	ý	3.8	7.1	8.9	3.8	9.8	3.8	9.8	ns

# switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 5 V $\pm$ 0.5 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	то	T,	Δ = 25°C	;	54AC1	6373	74AC1	6373	UNIT
PARAMETER	(INPUT)	(OUTPUT)	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
<sup>t</sup> PLH	D	Q	3.1	6.7	8.5	3.1	9.7	3.1	9.7	ns
<sup>t</sup> PHL	D	ý	3.5	7.3	9.1	3.5	10.1	3.5	10.1	115
<sup>t</sup> PLH	LE	Q	3.8	8.2	10.2	3.8	11.9	3.8	11.9	
<sup>t</sup> PHL	LL	Q	3.6	7.8	9.7	3.6	10.9	3.6	10.9	ns
<sup>t</sup> PZH	OE	Q	3.5	7.4	9.4	3.5	10.8	3.5	10.8	-
<sup>t</sup> PZL	OE	Q	4.3	9.1	11.3	4.3	12.8	4.3	12.8	ns
<sup>t</sup> PHZ	OE	Q	3.9	6.6	8	3.9	8.8	3.9	8.8	ns
<sup>t</sup> PLZ	OE	ý	3.7	5.9	7.4	3.7	8.1	3.7	8.1	115


### operating characteristics, V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C

	PARAMETER	TEST CO	TYP	UNIT		
C <sub>pd</sub>	Power dissipation capacitance per latch	Outputs enabled Outputs disabled	C <sub>L</sub> = 50 pF,	f = 1 MHz	43 5	pF

PRODUCT PREVIEW information concerns products in the formative or design\_phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.



SCAS121B - MARCH 1990 - REVISED APRIL 1996

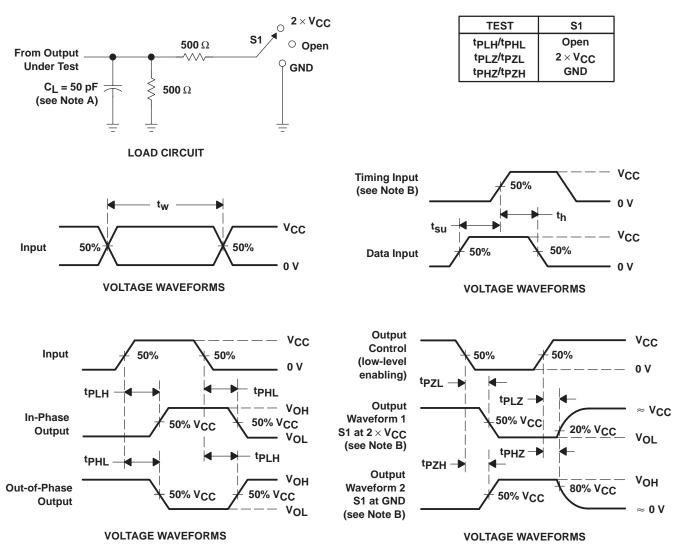

#### PARAMETER MEASUREMENT INFORMATION

NOTES: A. CI includes probe and jig capacitance.

B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.

C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz, Z<sub>Q</sub> = 50  $\Omega$ , t<sub>f</sub> = 3 ns, t<sub>f</sub> = 3 ns.

D. The outputs are measured one at a time with one input transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms





### PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
74AC16373DLR	ACTIVE	SSOP	DL	48	1000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AC16373	Samples

<sup>(1)</sup> The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



www.ti.com

### TAPE AND REEL INFORMATION





#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal	

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
74AC16373DLR	SSOP	DL	48	1000	330.0	32.4	11.35	16.2	3.1	16.0	32.0	Q1



www.ti.com

## PACKAGE MATERIALS INFORMATION

16-Apr-2024



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
74AC16373DLR	SSOP	DL	48	1000	367.0	367.0	55.0

DL (R-PDSO-G48)

PLASTIC SMALL-OUTLINE PACKAGE



- A. All linear dimensions are in inches (millimeters).B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MO-118

PowerPAD is a trademark of Texas Instruments.



### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2024, Texas Instruments Incorporated