SCAS215B - JANUARY 1988 - REVISED JUNE 1997

<ul> <li>Inputs Are TTL-Voltage Compatible</li> <li>Flow-Through Architecture Optimizes PCB</li> </ul>	DB, DW, N, OR PW PACKAGE (TOP VIEW)				
Layout					
<ul> <li>Center-Pin V<sub>CC</sub> and GND Configurations</li></ul>	2Y [ 2 19 ] 2A				
Minimize High-Speed Switching Noise	3Y [ 3 18 ] 3A				
<ul> <li>EPIC<sup>™</sup> (Enhanced-Performance Implanted</li></ul>	GND [ 4 17 ] NC				
CMOS) 1-µm Process	GND [ 5 16 ] V <sub>CC</sub>				
<ul> <li>500-mA Typical Latch-Up Immunity at</li></ul>	GND [] 6 15 ]] V <sub>CC</sub>				
125°C	GND [] 7 14 ]] NC				
<ul> <li>Package Options Include Plastic</li></ul>	4Y [] 8 13 [] 4A				
Small-Outline (DW), Shrink Small-Outline	5Y [] 9 12 [] 5A				
(DB), and Thin Shrink Small-Outline (PW)	6Y [] 10 11 [] 6A				
Packages and Standard Plastic (N) 300-mil DIPs	NC – No internal connection				

#### description

This device contains six independent inverters. It performs the Boolean function  $Y = \overline{A}$ .

The 74ACT11004 is characterized for operation from -40°C to 85°C.

FUNCTION TABLE (each inverter)						
INPUT A	OUTPUT Y					
Н	L					
L	Н					

#### logic symbol<sup>†</sup>

1A	20	1		1Y
	19	•	2	
2A	18		3	2Y
3A	13		8	3Y 4Y
4A	12		9	
5A	11		10	5Y
6A			<u> </u>	6Y

<sup>†</sup> This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

EPIC is a trademark of Texas Instruments Incorporated.


PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



Copyright © 1997, Texas Instruments Incorporated

SCAS215B - JANUARY 1988 - REVISED JUNE 1997

#### logic diagram (positive logic)



#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

Supply voltage range, V <sub>CC</sub>		
Input voltage range, V <sub>I</sub> (see Note 1)		
Output voltage range, V <sub>O</sub> (see Note 1)		–0.5 V to V <sub>CC</sub> + 0.5 V
Input clamp current, $I_{IK}$ ( $V_I < 0$ or $V_I > V_{CC}$ ).		±20 mA
Output clamp current, $I_{OK}$ (V <sub>O</sub> < 0 or V <sub>O</sub> > V <sub>CO</sub>	с)	±50 mA
Continuous output current, $I_O (V_O = 0 \text{ to } V_{CC})$	-	±50 mA
Continuous current through V <sub>CC</sub> or GND		±150 mA
Package thermal impedance, $\theta_{JA}$ (see Note 2)	): DB package	115°C/W
	DW package	
	N package	67°C/W
	PW package	128°C/W
Storage temperature range, T <sub>stg</sub>		

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

2. The package thermal impedance is calculated in accordance with JESD 51, except for through-hole packages, which use a trace length of zero.

#### recommended operating conditions

		MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage	4.5	5.5	V
VIH	High-level input voltage	2		V
VIL	Low-level input voltage		0.8	V
VI	Input voltage	0	VCC	V
VO	Output voltage	0	VCC	V
IОН	High-level output current		-24	mA
IOL	Low-level output current		24	mA
$\Delta t/\Delta v$	Input transition rise or fall rate	0	10	ns/V
Τ <sub>Α</sub>	Operating free-air temperature	-40	85	°C



SCAS215B - JANUARY 1988 - REVISED JUNE 1997

	TEST CONDITIONS	Vaa	T <sub>A</sub> = 25°C			MIN		UNIT
PARAMETER	TEST CONDITIONS	Vcc	MIN	TYP	MAX	WIIN	MAX	UNIT
	1 50.04	4.5 V	4.4			4.4		
	I <sub>OH</sub> = -50 μA	5.5 V	5.4			5.4		
VOH		4.5 V	3.94			3.8		V
	I <sub>OH</sub> = -24 mA	5.5 V	4.94			4.8		
	$I_{OH} = -75 \text{ mA}^{\dagger}$	5.5 V				3.85		
		4.5 V			0.1		0.1	
	I <sub>OL</sub> = 50 μA	5.5 V			0.1		0.1	
VOL	$l_{m} = 24 \text{ mA}$	4.5 V			0.36		0.44	V
	$I_{OL} = 24 \text{ mA}$	5.5 V			0.36		0.44	
	$I_{OL} = 75 \text{ mA}^{\dagger}$	5.5 V					1.65	
lj	$V_{I} = V_{CC}$ or GND	5.5 V			±0.1		±1	μA
ICC	$V_{I} = V_{CC} \text{ or } GND, \qquad I_{O} = 0$	5.5 V			4		40	μA
$\Delta I_{CC}^{\ddagger}$	One input at 3.4 V, Other inputs at GND or $V_{CC}$	5.5 V			0.9		1	mA
Ci	V <sub>I</sub> = V <sub>CC</sub> or GND	5 V		3.5				pF

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

<sup>†</sup>Not more than one output should be tested at a time, and the duration of the test should not exceed 10 ns.

<sup>‡</sup>This is the increase in supply current for each input that is at one of the specified TTL voltage levels rather than 0 V or V<sub>CC</sub>.

# switching characteristics over recommended ranges of supply voltage and free-air temperature (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	то	Т	<b>₄ = 25°C</b>	;	MIN	МАХ	UNIT
	(INPUT)	(OUTPUT)	MIN	TYP	MAX			
<sup>t</sup> PLH	٨	v	1.5	5.3	9	1.5	9.7	200
<sup>t</sup> PHL	А	I	1.5	6.4	8.7	1.5	9.6	ns


### operating characteristics, $V_{CC}$ = 5 V, $T_A$ = 25°C

	PARAMETER	TEST CO	TYP	UNIT	
C <sub>pd</sub>	Power dissipation capacitance per inverter	C <sub>L</sub> = 50 pF,	f = 1 MHz	32	pF



SCAS215B - JANUARY 1988 - REVISED JUNE 1997

#### PARAMETER MEASUREMENT INFORMATION

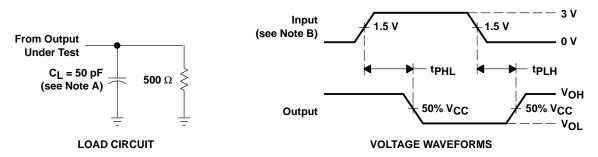

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. Input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz, Z<sub>O</sub> = 50  $\Omega$ , t<sub>f</sub> = 3 ns, t<sub>f</sub> = 3 ns.
- C. The outputs are measured one at a time with one input transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms





#### PACKAGING INFORMATION

Orderable Device	Status	Package Type	Package	Pins	Package	Eco Plan	Lead finish/	MSL Peak Temp	Op Temp (°C)	Device Marking	Samples
	(1)		Drawing		Qty	(2)	Ball material	(3)		(4/5)	
							(6)				
74ACT11004DW	ACTIVE	SOIC	DW	20	25	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ACT11004	Samples
74ACT11004N	ACTIVE	PDIP	Ν	20	20	RoHS & Non-Green	NIPDAU	N / A for Pkg Type	-40 to 85	74ACT11004N	Samples
74ACT11004PW	ACTIVE	TSSOP	PW	20	70	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AT004	Samples

<sup>(1)</sup> The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



www.ti.com

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### TEXAS INSTRUMENTS

www.ti.com

6-Apr-2024

#### TUBE



### - B - Alignment groove width

#### \*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	Τ (μm)	B (mm)
74ACT11004DW	DW	SOIC	20	25	507	12.83	5080	6.6
74ACT11004N	N	PDIP	20	20	506	13.97	11230	4.32
74ACT11004PW	PW	TSSOP	20	70	530	10.2	3600	3.5

## N (R-PDIP-T\*\*)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



NOTES:

- A. All linear dimensions are in inches (millimeters).B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- $\triangle$  The 20 pin end lead shoulder width is a vendor option, either half or full width.



# **DW0020A**



# **PACKAGE OUTLINE**

### SOIC - 2.65 mm max height

SOIC



NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M. 2. This drawing is subject to change without notice. 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
- 5. Reference JEDEC registration MS-013.



# DW0020A

# **EXAMPLE BOARD LAYOUT**

### SOIC - 2.65 mm max height

SOIC



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



# DW0020A

# **EXAMPLE STENCIL DESIGN**

### SOIC - 2.65 mm max height

SOIC



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



# **PW0020A**



# **PACKAGE OUTLINE**

### TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M. 2. This drawing is subject to change without notice. 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



# PW0020A

# **EXAMPLE BOARD LAYOUT**

### TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



# PW0020A

# **EXAMPLE STENCIL DESIGN**

### TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



### LAND PATTERN DATA



NOTES: Α. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
  C. Publication IPC-7351 is recommended for alternate design.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2024, Texas Instruments Incorporated