



#### **FEATURES**

- Member of the Texas Instruments Widebus™
   Family
- EPIC<sup>™</sup> (Enhanced-Performance Implanted CMOS) Submicron Process
- ESD Protection Exceeds 2000 V Per MIL-STD-883, Method 3015; Exceeds 200 V Using Machine Model (C = 200 pF, R = 0)
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- Bus Hold on Data Inputs Eliminates the Need for External Pullup/Pulldown Resistors
- Package Options Include Plastic 300-mil Shrink Small-Outline (DL), Thin Shrink Small-Outline (DGG), and Thin Very Small-Outline (DGV) Packages


#### DESCRIPTION

This 20-bit flip-flop is designed specifically for 1.65-V to 3.6-V  $V_{\rm CC}$  operation.

The 20 flip-flops of the SN74ALVCH16721 are edge-triggered D-type flip-flops with qualified clock storage. On the positive transition of the clock (CLK) input, the device provides true data at the Q outputs if the clock-enable (CLKEN) input is low. If CLKEN is high, no data is stored.

A buffered output-enable  $(\overline{OE})$  input places the 20 outputs in either a normal logic state (high or low) or the high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly. The high-impedance state and increased drive provide the capability to drive bus lines without need for interface or pullup components.  $\overline{OE}$  does not affect the internal operation of the flip-flops. Old data can be retained or new data can be entered while the outputs are in the high-impedance state.

# DGG, DGV, OR DL PACKAGE (TOP VIEW)

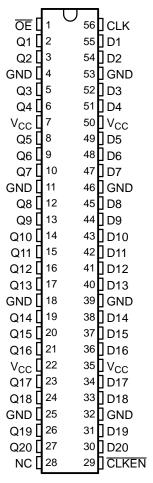

NC - No internal connection

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

Active bus-hold circuitry is provided to hold unused or floating data inputs at a valid logic level.

The SN74ALVCH16721 is characterized for operation from -40°C to 85°C.

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.


Widebus, EPIC are trademarks of Texas Instruments.



# FUNCTION TABLE (each flip-flop)

	INP	UTS		OUTPUT
ŌĒ	CLKEN	CLK	D	Q
L	Н	X	Х	$Q_0$
L	L	1	Н	Н
L	L	$\uparrow$	L	L
L	L	L or H	Χ	$Q_0$
Н	X	X	Χ	z

# LOGIC DIAGRAM (POSITIVE LOGIC)

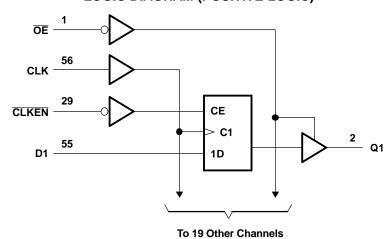



## SN74ALVCH16721 3.3-V 20-BIT FLIP-FLOP WITH 3-STATE OUTPUTS

## **ABSOLUTE MAXIMUM RATINGS**(1)

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage range		-0.5	4.6	V
VI	Input voltage range <sup>(2)</sup>		-0.5	4.6	V
Vo	Output voltage range <sup>(2)(3)</sup>		-0.5	V <sub>CC</sub> + 0.5	V
I <sub>IK</sub>	Input clamp current	V <sub>I</sub> < 0		-50	mA
I <sub>OK</sub>	Output clamp current	V <sub>O</sub> < 0	,	-50	mA
Io	Continuous output current	•		±50	mA
	Continuous current through each V <sub>CC</sub> or G	ND	•	±100	mA
		DGG package		81	
$\theta_{JA}$	Package thermal impedance <sup>(4)</sup>	DGV package		86	°C/W
		DL package	,	74	•
T <sub>stg</sub>	Storage temperature range	·	-65	150	°C

<sup>(1)</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### **RECOMMENDED OPERATING CONDITIONS(1)**

			MIN	MAX	UNIT
V <sub>cc</sub>	Supply voltage		1.65	3.6	V
		V <sub>CC</sub> = 1.65 V to 1.95 V	0.65 × V <sub>CC</sub>		
V <sub>IH</sub>	High-level input voltage	V <sub>CC</sub> = 2.3 V to 2.7 V	1.7		V
		$V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$	2		
		V <sub>CC</sub> = 1.65 V to 1.95 V		$0.35 \times V_{CC}$	
$V_{IL}$	Low-level input voltage	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$		0.7	V
		V <sub>CC</sub> = 2.7 V to 3.6 V		0.8	
V <sub>I</sub>	Input voltage	·	0	V <sub>CC</sub>	V
Vo	Output voltage		0	V <sub>CC</sub>	V
		V <sub>CC</sub> = 1.65 V		-4	
,	High lavel output ourrent	V <sub>CC</sub> = 2.3 V		-12	mA
I <sub>OH</sub>	High-level output current	V <sub>CC</sub> = 2.7 V		-12	mA
		V <sub>CC</sub> = 3 V		-24	
		V <sub>CC</sub> = 1.65 V		4	
l	Laurianal antont annot	V <sub>CC</sub> = 2.3 V		12	^
I <sub>OL</sub>	Low-level output current	V <sub>CC</sub> = 2.7 V		12	mA
		V <sub>CC</sub> = 3 V		24	
Δt/Δν	Input transition rise or fall rate	•		10	ns/V
T <sub>A</sub>	Operating free-air temperature		-40	85	°C

<sup>(1)</sup> All unused control inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

<sup>(2)</sup> The input negative-voltage and output voltage ratings may be exceeded if the input and output current ratings are observed.

<sup>3)</sup> This value is limited to 4.6 V maximum.

<sup>(4)</sup> The package thermal impedance is calculated in accordance with JESD 51.

SCES052E-JULY 1995-REVISED AUGUST 2004



#### **ELECTRICAL CHARACTERISTICS**

over recommended operating free-air temperature range (unless otherwise noted)

PA	ARAMETER	TEST CONDITIONS	V <sub>cc</sub>	MIN	TYP <sup>(1)</sup> MAX	UNIT
		I <sub>OH</sub> = -100 μA	1.65 V to 3.6 V	V <sub>CC</sub> - 0.2		
		I <sub>OH</sub> = -4 mA	1.65 V	1.2	,	
		I <sub>OH</sub> = -6 mA	2.3 V	2		
V <sub>OH</sub>			2.3 V	1.7		V
		I <sub>OH</sub> = -12 mA	2.7 V	2.2		
			3 V	2.4		
		I <sub>OH</sub> = -24 mA	3 V	2		
		I <sub>OL</sub> = 100 μA	1.65 V to 3.6 V		0.2	
		I <sub>OL</sub> = 4 mA	1.65 V		0.45	
,,		I <sub>OL</sub> = 6 mA	2.3 V		0.4	
V <sub>OL</sub>		10.77	2.3 V		0.7	V
		I <sub>OL</sub> = 12 mA	2.7 V		0.4	
		I <sub>OL</sub> = 24 mA	3 V		0.55	
I <sub>I</sub>		V <sub>I</sub> = V <sub>CC</sub> or GND	3.6 V		±5	μΑ
		V <sub>I</sub> = 0.58 V	1.65 V	25		
		V <sub>I</sub> = 1.07 V	1.65 V	-25	,	
		V <sub>I</sub> = 0.7 V	2.3 V	45	,	
I <sub>I(hold)</sub>		V <sub>I</sub> = 1.7 V	2.3 V	-45		μΑ
		V <sub>I</sub> = 0.8 V	3 V	75		
		V <sub>I</sub> = 2 V	3 V	-75	,	
		V <sub>I</sub> = 0 to 3.6 V <sup>(2)</sup>	3.6 V		±500	
l <sub>oz</sub>		$V_O = V_{CC}$ or GND	3.6 V		±10	μΑ
I <sub>CC</sub>		$V_I = V_{CC}$ or GND, $I_O = 0$	3.6 V		40	μΑ
$\Delta I_{CC}$		One input at V <sub>CC</sub> - 0.6 V, Other inputs at V <sub>CC</sub> or GND	3 V to 3.6 V		750	μΑ
	Control inputs	V V C CND	221/		3.5	
Ci	Data inputs	$V_I = V_{CC}$ or GND	3.3 V		6	pF
C <sub>o</sub>	Outputs	V <sub>O</sub> = V <sub>CC</sub> or GND	3.3 V		7	pF

#### **TIMING REQUIREMENTS**

over recommended operating free-air temperature range (unless otherwise noted) (see Figures 1 through 3)

			V <sub>CC</sub> =	1.8 V	V <sub>CC</sub> = ± 0.	2.5 V 2 V	V <sub>CC</sub> =	2.7 V	V <sub>CC</sub> = ± 0.	3.3 V 3 V	UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
f <sub>clock</sub>	Clock frequency			(1)		150		150		150	MHz
t <sub>w</sub>	Pulse duration, CLK high or lo	W	(1)		3.3		3.3		3.3		ns
	Sotup time	Data before CLK↑	(1)		4		3.6		3.1		2
I <sub>su</sub>	Setup time	CLKEN before CLK↑	(1)		3.4		3.1		2.7		ns
46	Hold time	Data after CLK↑	(1)		0		0		0		2
th	noid time	CLKEN after CLK↑	(1)		0		0		0		ns

<sup>(1)</sup> This information was not available at the time of publication.

All typical values are at  $V_{CC} = 3.3 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ . This is the bus-hold maximum dynamic current. It is the minimum overdrive current required to switch the input from one state to another.





### **SWITCHING CHARACTERISTICS**

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub> =	1.8 V	V <sub>CC</sub> = ± 0.2	2.5 V 2 V	V <sub>CC</sub> =	2.7 V	V <sub>CC</sub> = 3 ± 0.3	3.3 V 3 V	UNIT
	(INFOT)	(001701)	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
f <sub>max</sub>			(1)		150		150		150		MHz
t <sub>pd</sub>	CLK	Q		(1)	1	5.6	1	5.1	1	4.3	ns
t <sub>en</sub>	ŌĒ	Q		(1)	1	6.1	1	5.8	1	4.8	ns
t <sub>dis</sub>	ŌĒ	Q		(1)	1	5.5	1	4.7	1	4.4	ns

<sup>(1)</sup> This information was not available at the time of publication.

### **OPERATING CHARACTERISTICS**


 $T_A = 25^{\circ}C$ 

	PARAMETER		TEST CONDITIONS	V <sub>CC</sub> = 1.8 V TYP	V <sub>CC</sub> = 2.5 V TYP	V <sub>CC</sub> = 3.3 V TYP	UNIT
	Power dissipation	Outputs enabled	$C_1 = 50 \text{ pF},  f = 10 \text{ MHz}$	(1)	55	59	n.E
Opd	capacitance Outputs disabled		$C_L = 50 \text{ pF}, f = 10 \text{ MHz}$	(1)	46	49	pF

<sup>(1)</sup> This information was not available at the time of publication.



# PARAMETER MEASUREMENT INFORMATION $V_{CC} = 1.8 \text{ V}$

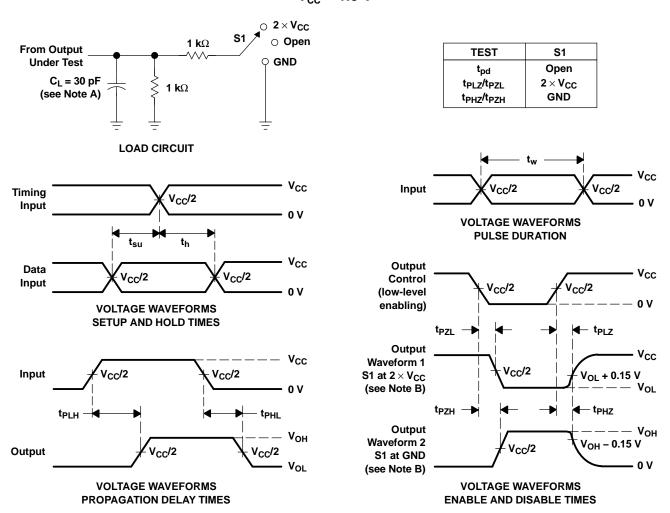


- NOTES: A. C<sub>I</sub> includes probe and jig capacitance.
  - B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
  - C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz, Z<sub>O</sub> = 50  $\Omega$ ,  $t_{f} \leq$  2 ns,  $t_{f} \leq$  2 ns.
  - D. The outputs are measured one at a time, with one transition per measurement.
  - E.  $t_{Pl,7}$  and  $t_{PH7}$  are the same as  $t_{dis}$ .
  - F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
  - G.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .

Figure 1. Load Circuit and Voltage Waveforms



# PARAMETER MEASUREMENT INFORMATION $V_{CC}$ = 2.5 V $\pm$ 0.2 V

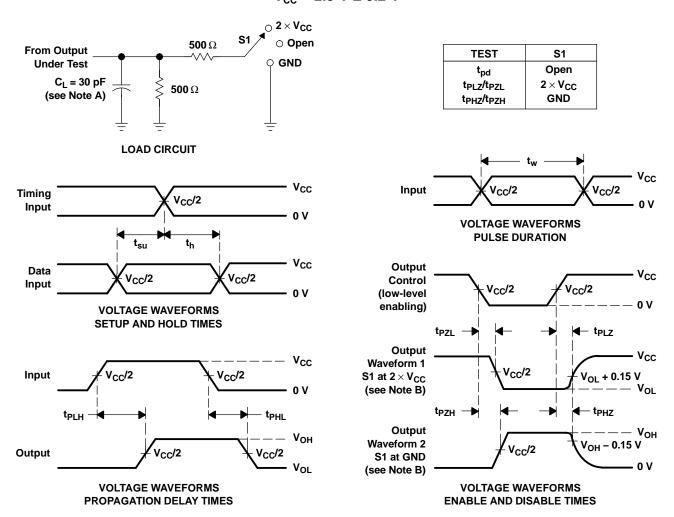


- NOTES: A.  $C_L$  includes probe and jig capacitance.
  - B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
  - C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_O = 50 \Omega$ ,  $t_f \leq$  2 ns,  $t_f \leq$  2 ns.
  - D. The outputs are measured one at a time, with one transition per measurement.
  - E.  $t_{PLZ}$  and  $t_{PHZ}$  are the same as  $t_{dis}$ .
  - F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
  - G. t<sub>PLH</sub> and t<sub>PHL</sub> are the same as t<sub>pd</sub>.

Figure 2. Load Circuit and Voltage Waveforms



# PARAMETER MEASUREMENT INFORMATION $V_{CC}$ = 2.7 V AND 3.3 V $\pm$ 0.3 V

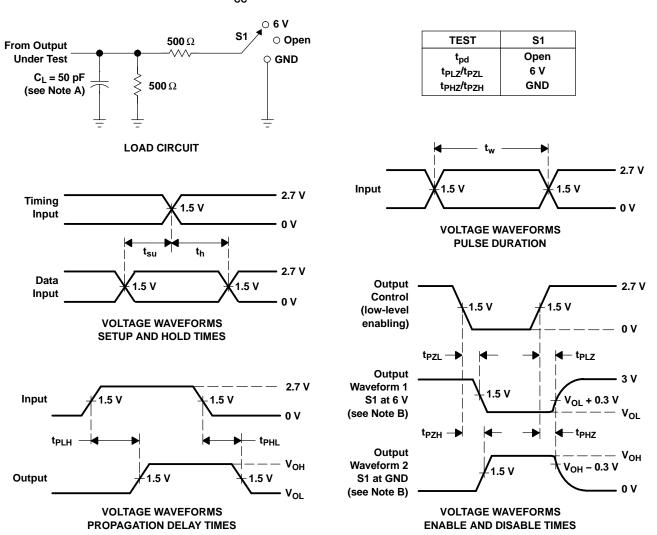

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_O = 50 \Omega$ ,  $t_f \leq$  2.5 ns.  $t_f \leq$  2.5 ns.
- D. The outputs are measured one at a time, with one transition per measurement.
- E. t<sub>PLZ</sub> and t<sub>PHZ</sub> are the same as t<sub>dis</sub>.
- F.  $t_{PZL}$  and  $t_{PZH}$  are the same as  $t_{en}$ .
- G. t<sub>PLH</sub> and t<sub>PHL</sub> are the same as t<sub>pd</sub>.

Figure 3. Load Circuit and Voltage Waveforms



## PACKAGE OPTION ADDENDUM

10-Dec-2020

#### **PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
SN74ALVCH16721DGGR	ACTIVE	TSSOP	DGG	56	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVCH16721	Samples
SN74ALVCH16721DL	ACTIVE	SSOP	DL	56	20	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVCH16721	Samples
SN74ALVCH16721DLR	ACTIVE	SSOP	DL	56	1000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ALVCH16721	Samples

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead finish/Ball material Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



## **PACKAGE OPTION ADDENDUM**

10-Dec-2020

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 5-Jan-2022

## TAPE AND REEL INFORMATION





	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74ALVCH16721DGGR	TSSOP	DGG	56	2000	330.0	24.4	8.6	15.6	1.8	12.0	24.0	Q1
SN74ALVCH16721DLR	SSOP	DL	56	1000	330.0	32.4	11.35	18.67	3.1	16.0	32.0	Q1

www.ti.com 5-Jan-2022

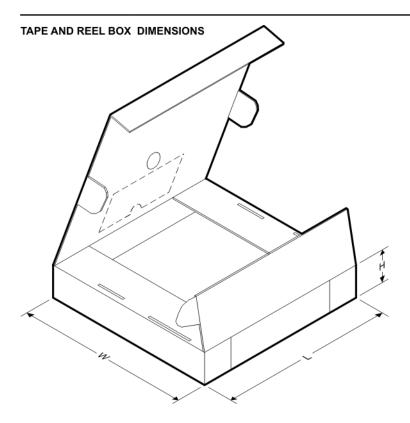


#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74ALVCH16721DGGR	TSSOP	DGG	56	2000	367.0	367.0	45.0
SN74ALVCH16721DLR	SSOP	DL	56	1000	367.0	367.0	55.0

# PACKAGE MATERIALS INFORMATION

www.ti.com 5-Jan-2022

### **TUBE**

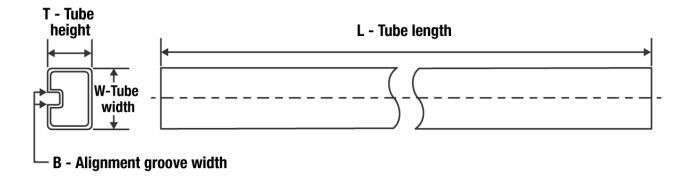


#### \*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
SN74ALVCH16721DL	DL	SSOP	56	20	473.7	14.24	5110	7.87

# DL (R-PDSO-G56)

# PLASTIC SMALL-OUTLINE PACKAGE

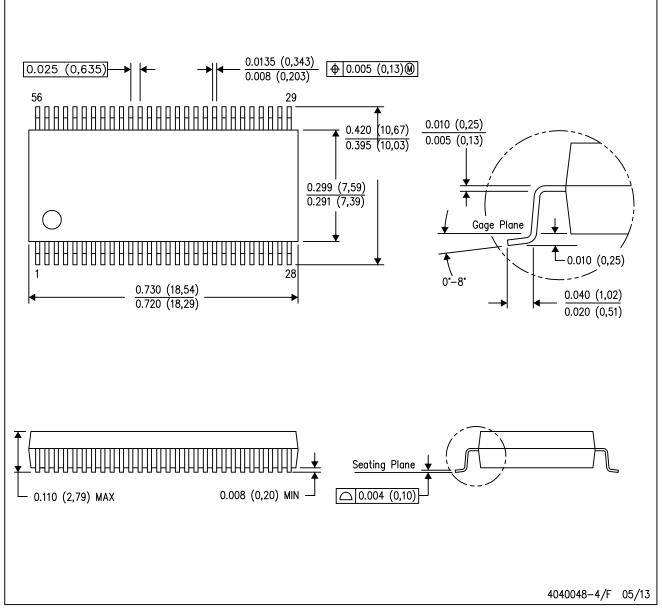

NOTES:


- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MO-118

PowerPAD is a trademark of Texas Instruments.





SMALL OUTLINE PACKAGE

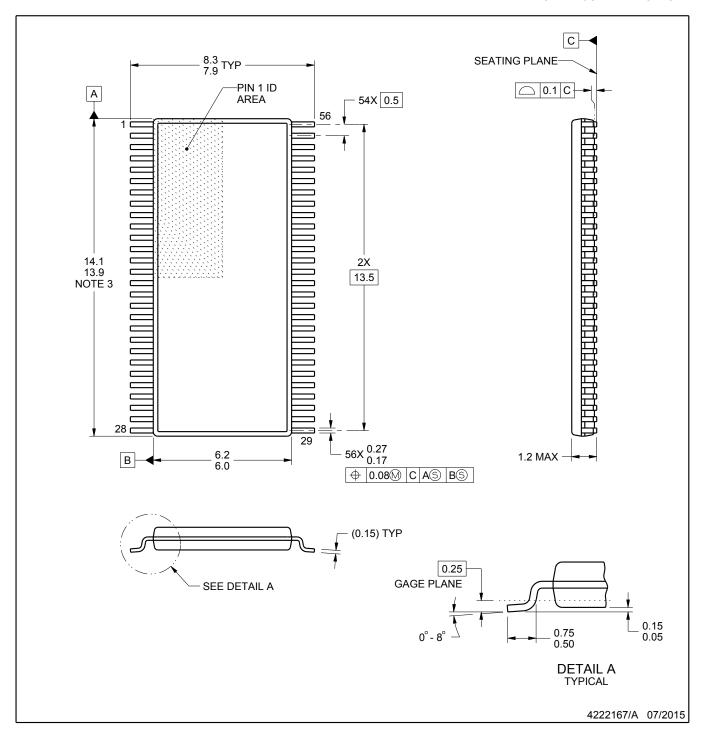

#### NOTES:


- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
  4. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE

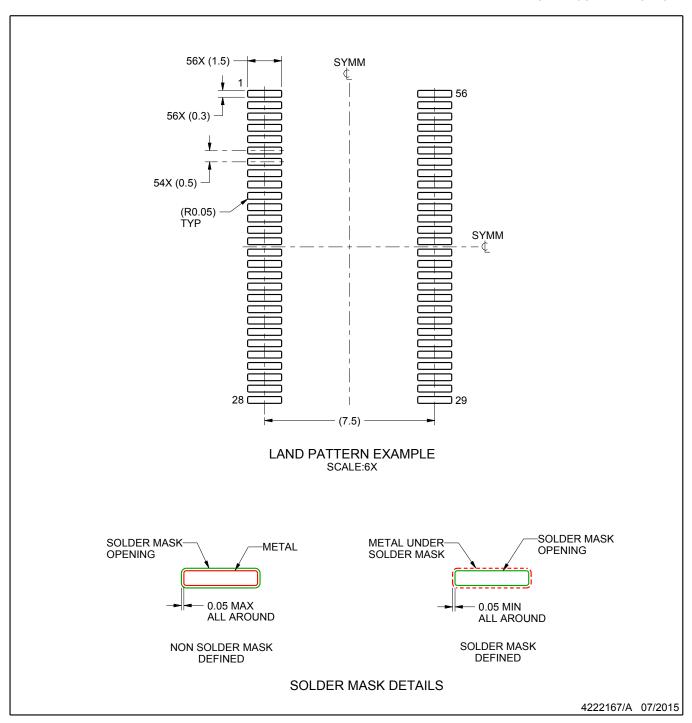


NOTES: (continued)

- 5. Publication IPC-7351 may have alternate designs.
- 6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE

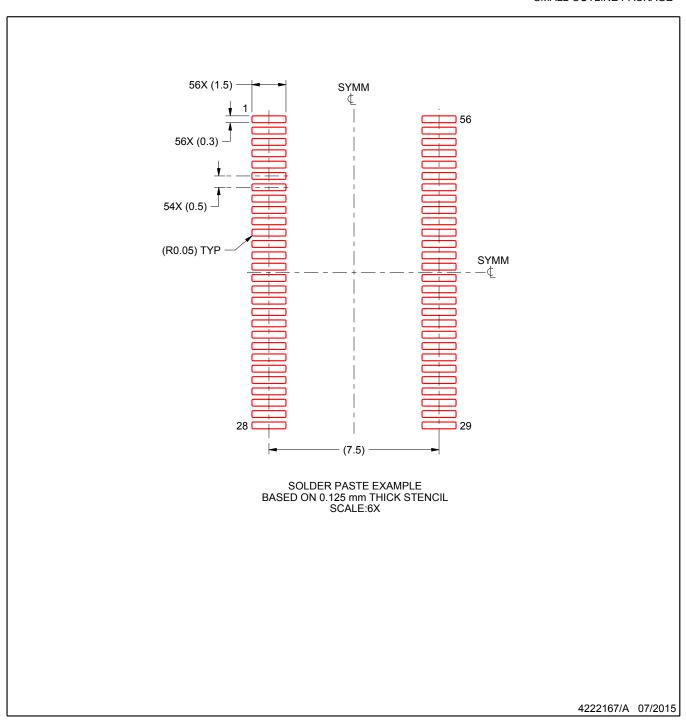

NOTES: (continued)

- Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 8. Board assembly site may have different recommendations for stencil design.



### **IMPORTANT NOTICE AND DISCLAIMER**

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2022, Texas Instruments Incorporated